


FX0415 Datasheet

Product Name // Fuseholder FX0415-FX0416 Range
Protection Category PC2 Panel Mount 4.8 Range Tab
Termination 6.3mm x 32mm Fuse Screw Cap Carrier Hand Release

 [View Product Page](#)

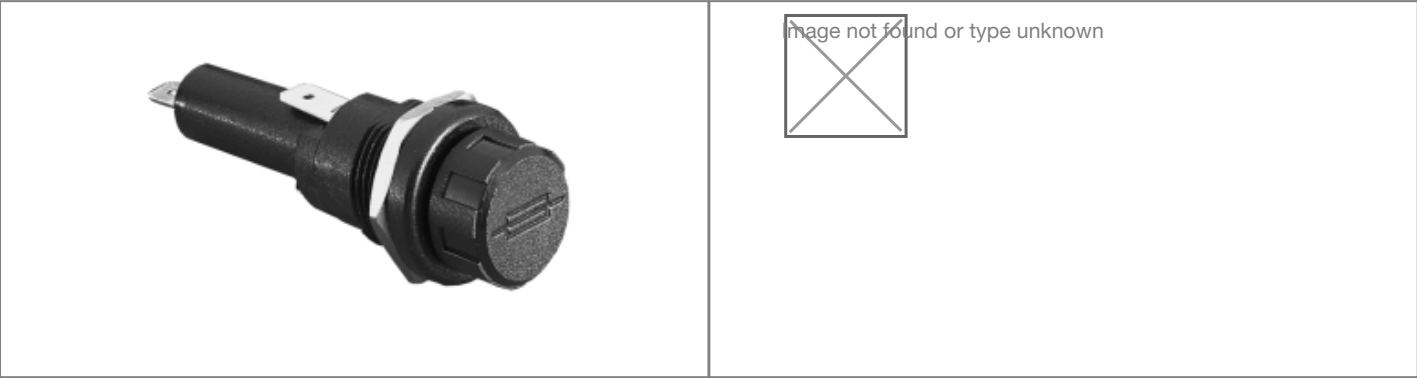

// Product Description:	
- Protection Category PC2 Touchproof Fuseholder - Screw Cap fuse carrier - Choice of fuse size and release method, depending on part code: - FX0415 - 6.3mm x 32mm fuse, Hand Release - FX0415/S - 6.3mm x 32mm fuse, Screwdriver Release	- FX0416 - 6.3mm x 25mm fuse, Hand Release - FX0416/S - 6.3mm x 25mm fuse, Screwdriver Release - Panel mount 4.8 Series Tab Termination - Insulation Boot for rear of connector available separately (part code 12932)

// General Information:	
Product Display Title:	Protection Category PC2 Touchproof Fuseholder
Product Family:	Fuseholders
Product Series:	PC Mounting PC1, PC2 and PC3
Approvals:	UL
Body Material:	Nylon 66 - Glass Filled
Current Max:	16A
Flamability Rating:	UL94V-0
Function:	Pc2 Fuseholder
Fuseholder Protection Category:	PC2
Fuse Carrier:	Screw Cap/Hand Release
Fuse Size:	6.3mm x 32mm
Max Operating Temperature:	+85°C
Min Operating Temperature:	-20~∞C
Voltage Max:	250V

// Product PDF Links

 [Fuseholders product data](#)

// Product 3D CAD Model Links

 [FX04153D CAD Model](#)