


BEA01S - ABS  
BEP01S - Polycarbonate




- Dimensions: 80 x 72 x 53mm
- Slotted mounting holes, 66.2 x 58.8mm
- 2 x M20 threaded knock-outs suitable for use with M20 glands
- Option for single pre-drilled 22mm Ø hole in lid
- PCB mounting posts suitable for M3 self tapping screws
- ABS or Flame Retardant Polycarbonate material options
- Grey or black base
- Transparent, black, grey or yellow lid

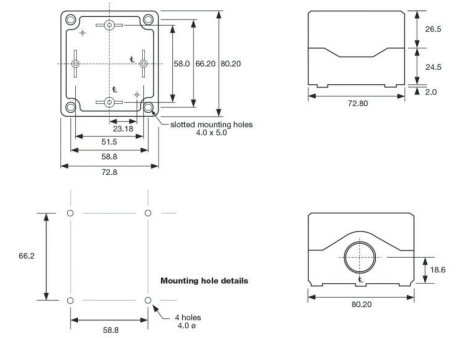

BEA02S - ABS  
BEP02S - Polycarbonate




- Dimensions: 80 x 106 x 53mm
- Slotted mounting holes, 66.2 x 92.0mm
- 2 x M20 threaded knock-outs suitable for use with M20 glands
- Option for two pre-drilled 22mm Ø holes in lid
- PCB mounting posts suitable for M3 self tapping screws
- ABS or Flame Retardant Polycarbonate material options
- Grey or black base
- Transparent, black, grey or yellow lid

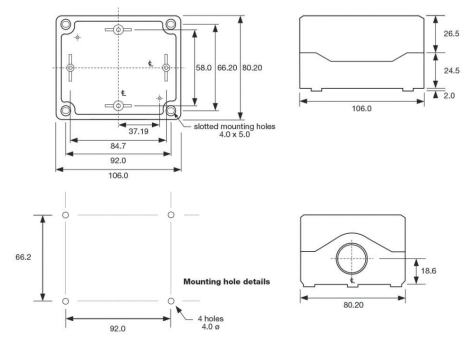

BEA03S - ABS  
BEP03S - Polycarbonate



- Dimensions: 80 x 139 x 53mm
- Slotted mounting holes, 66.2 x 125mm
- 2 x M20 threaded knock-outs suitable for use with M20 glands
- Option for three pre-drilled 22mm Ø holes in lid
- PCB mounting posts suitable for M3 self tapping screws
- ABS or Flame Retardant Polycarbonate material options
- Grey or black base
- Transparent, black, grey or yellow lid

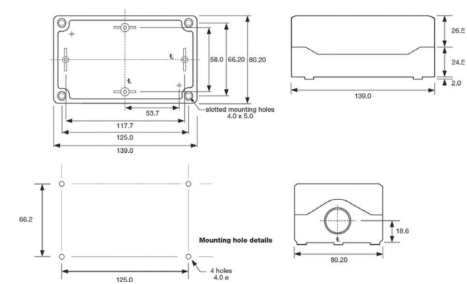

Combifoot rail mounting  
accessory



- Easy snap fixing to enclosure
- Suitable for TS32 & TS35 rails
- Available in black or grey
- Part numbers:
  - Grey - BE123456
  - Black - BE123457

Wall mounting accessory



- Easy snap fixing to enclosure
- For easy access wall mounting
- Available in black or grey
- Part numbers:
  - Grey - BE123458
  - Black - BE123459

Cable glands



- For use in pre-moulded knock-outs
- M20 thread
- Cable range 6-12mm
- Supplied with gasket
- Available in black or grey
- Part numbers:
  - Grey - BE123460
  - Black - BE123461

## Specifications

	BEAxxx	BEPxxx
<b>Sealing:</b>	IP67	IP67
<b>Material:</b>	ABS	Polycarbonate
<b>Flammability rating:</b>	UL94HB	UL94V-0
<b>Gasket:</b>	TPE	TPE
<b>Temperature rating:</b>	-20°C to +85°C	-20°C to +100°C

## Features

- IP67 rated, dust and waterproof for short-term submersion to 1m depth
- Two materials, Polycarbonate - UL94V-0 rated or ABS - UL94HB rated
- Threaded M20 knock-outs, premoulded areas that can be pushed out for use with M20 size cable glands
- Plastic lid fixing screws, corrosion resistant
- Captive lid screws, standard on all lids
- Additional pre-drilled 22mm holes in the lid may be specified, suitable for standard switches and indicators
- PCB mounting, mounting posts and slots for PCB as standard
- Self tapping screw fixing, standard feature
- Transparent top cover, available in clear and smoke grey
- Accessories:
  - Wall mounting brackets
  - Combifoot - TS32 & TS35 din rail mounting
  - M20 cable glands for use in knock-outs
- Registered design

BE	/	X		XXX	/	X	/	X		X
<b>Body Styles</b>				<b>Size</b>		<b>Base Colour</b>		<b>Lid Colour</b>		<b>Pre-drilled Lid Holes</b>
				A = ABS - UL94HB P = Polycarb - UL94V-0		B = black G = grey		B = black G = grey Y = yellow T = transparent		0 = no holes 1 = with hole(s) (1 x 22mmØ Size 1, 2 x 22mmØ Size 2 & 3 x 22mmØ Size 3 Enclosures)

## Examples:

BEA02SGT0 = Size 2, ABS material, grey base, transparent lid with no holes