


**Product Name // Vertical Power Entry Module 59mm Side Fixing Flange Mount C14 Cold Condition Inlet Integral Twin Fused (PF0033) 2.8mm Tab Termination Unfiltered Single Contact Illuminated Switch Green**

 [View Product Page](#)

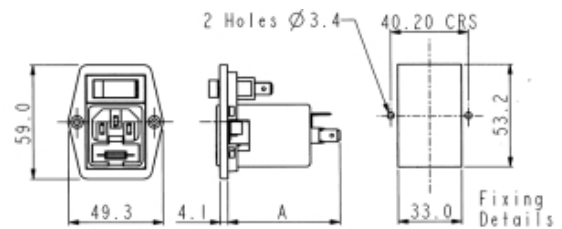

BVB01/\*\*\*\*\*/\*\* } A = 59.1 with filter  
 BVB02/\*\*\*\*\*/\*\* } A = 26.8 without filter  
 BVB15/\*\*\*\*\*/\*\* } A = 59.1 with filter  
 BVB16/\*\*\*\*\*/\*\* } A = 38.3 without filter

### // Product Description:

- ⊞ Vertical Power Entry Module 67.5mm/81.5mm (part codes prefixed BVA) and 59mm/72.3mm (part codes prefixed BVB)
- ⊞ Screw fix to panel via choice of fixing flanges, depending on part code:
  - ⊞ Part codes prefixed BVA: Top fixing flanges
  - ⊞ Part codes prefixed BVB: Side fixing flanges
- ⊞ C14 Cold Condition Inlet with integral fuseholder(s) depending on part code:
  - ⊞ Part codes prefixed BVA01, BVB01, BVA02, BVB02: PF0011 Single Fused Inlet
  - ⊞ Part codes prefixed BVA15, BVB15, BVA16, BVB16: PF0033 Twin Fused Inlet
- ⊞ Choice of Termination depending on part code:
  - ⊞ Part codes prefixed BVA01, BVB01, BVA15, BVB15: 6.3mm Tab
  - ⊞ Part codes prefixed BVA02, BVB02, BVA16, BVB16: 2.8mm Tab
- ⊞ Choice of mains filter depending on part code:
  - ⊞ Part codes containing /Z0000 are unfiltered
  - ⊞ Choice of mains filter options (part codes containing codes starting /A)
- ⊞ Choice of many other options as specified by individual part code, including indicators, illuminated switches, switch markings, etc

### // General Information:

Product Display Title:	Vertical Power Entry Module 67.5mm/81.5mm (part codes prefixed BVA) and 59mm/72.3mm (part codes prefixed BVB)
Product Family:	IEC Connectors
Product Series:	Power Entry Modules
Current Max:	10A
Filter Type:	Unfiltered
Function:	C14 Inlets
Fuseholder Inlet Type:	Integral Twin Fused
iec Connector Components:	None
iec Connector Mates With:	PF0033
iec Filter Options:	Unfiltered
iec Neon Colour:	Green
iec Vertical Module Height:	59mm
Inlet Type:	C14 Cold Condition Inlet
Switch Type:	Single Contact Illuminated
Voltage Max:	250V

#### // Product PDF Links

 [Power Entry Modules product data](#)

#### // Product 3D CAD Model Links

 [BVB16/Z0000/083D CAD Model](#)