


# DX25LW012S Datasheet

Product Name // DX25LW012S 25mm Panel Cutout  
Diameter Vandal Resistant Indicator

 [View Product Page](#)

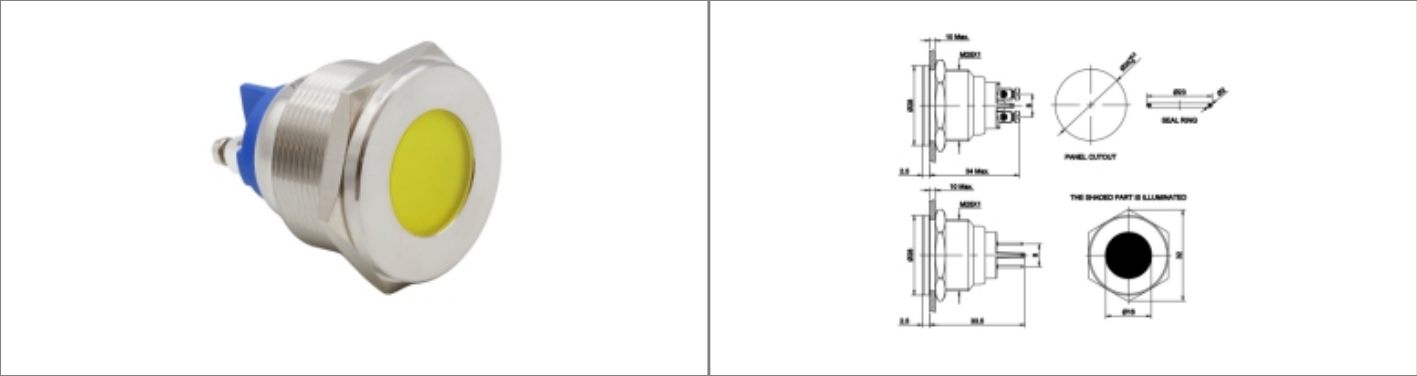

| // Product Description:                                                                          |                                                                                                     |
|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
|  DX Series      |  White             |
|  25mm Diameter |  12V              |
|  Solder Lug   |  Stainless Steel |

| // General Information:          |                                                       |
|----------------------------------|-------------------------------------------------------|
| Product Display Title:           | 25mm Panel Cutout Diameter Vandal Resistant Indicator |
| Product Family:                  | Indicators                                            |
| Product Series:                  | Vandal Resistant Indicators                           |
| Bezel Finish:                    | Machined                                              |
| Body Colour:                     | Stainless Steel                                       |
| Body Material:                   | Stainless Steel                                       |
| Body Material Type:              | Metal                                                 |
| Diameter:                        | 28mm                                                  |
| Dielectric Withstanding Voltage: | 1500V                                                 |
| Function:                        | Vandal Resistant Indicator                            |
| Illumination Colour:             | White                                                 |
| Illumination Voltage:            | 12V                                                   |
| Indicator Profile:               | Flat-round                                            |
| Insulation Resistance:           | ≥100MΩ(500VDC)                                        |
| Ip Rating:                       | IP67                                                  |
| Material Finish:                 | Machined                                              |
| Max Operating Temperature:       | 55°C                                                  |
| Min Operating Temperature:       | -25°C                                                 |
| Max Panel Thickness:             | 6mm                                                   |
| Panel Cut Out:                   | 25mm Diameter circle                                  |
| Rohs Compliant:                  | Yes                                                   |
| Shock Resistance:                | IK06                                                  |
| Thread Size:                     | M25 X 1                                               |

// Product PDF Links

 [Vandal Resistant Indicators](#)

// Product 3D CAD Model Links

 [DX25LW012S3D CAD Model](#)