
# EXP-0911/04/S/3 Datasheet



## Product Name // Flex Cable Connector EXP-0911 Series 4 Contact Socket 11mm-13mm Cable (Black Gland)

### View Product Page

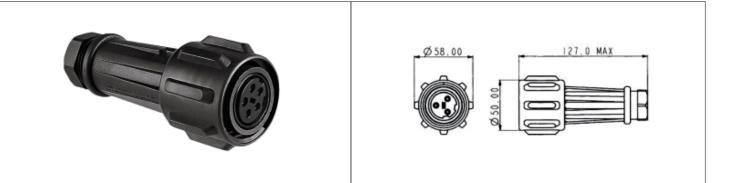

#### // Product Description:

- Flex Cable Connectors for hazardous areas
- O Water and dustproof to IP68 when mated with compatible connector
- O Positive fast-acting locking ring can be turned with a gloved hand
- O Plug or Socket
- 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version
- O Screw Terminals

- Choice of cable acceptance 7mm-22mm diameter depending on part code (see data for details):
- O EXP-09 part codes 7mm-15mm diameter
- EXP-A9 part codes (large cable version with strain relief clamp)
  14mm-22mm diameter
- O Packs of Cable Glands for differing cable diameters available separately (EXP-0980, EXP-A980)
- O EXP-0990 heavy duty Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with EXP-09 or EXP-A9 Series Flex and Panel Mounting Connectors, as appropriate

#### // General Information:

**Product Display Title: Product Family: Product Series:** Approvals: **Body Material:** Body Material Type: Contact Type: Coupling Type: **Current Max:** Diameter Over Coupling Ring Mm: Flamability Rating: Function: Ip Rating: Max Cable Entry Size: Min Cable Entry Size: Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max:

Flex Cable Connectors for hazardous areas **Circular Power Connectors EXPlora** UL Polyester (PET) Plastic Body Socket Contact Screw 18A 58mm UL94V-0 Flex Cable Connector IP68 13mm 11mm 14AWG 10AWG 4mm2 2.5mm2 +55°C -20°C 4 Contacts 600V

#### // Product PDF Links

EXPlora Series power connectors..

// Product 3D CAD Model Links

EXP-0911/04/S/33D CAD Model