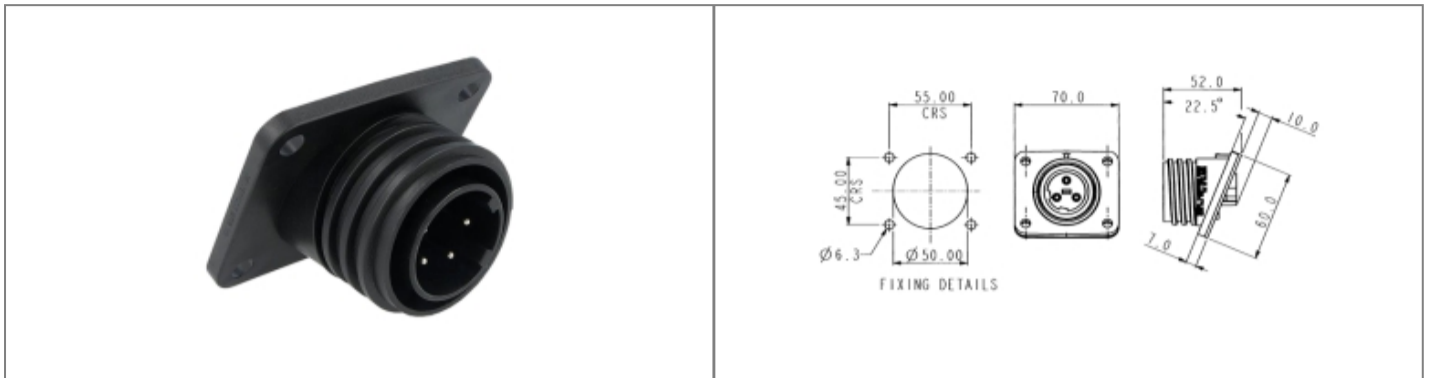


**Product Name // Flange Mount Connector EXP-0941
 Series 2 Contact Plug**
[View Product Page](#)

// Product Description:

- ⊞ Flange Mount Connectors for hazardous areas
- ⊞ Water and dustproof to IP68 when mated with compatible connector
- ⊞ Positive fast-acting locking ring - can be turned with a gloved hand
- ⊞ Plug or Socket
- ⊞ 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version
- ⊞ Supplied with high grade sealing gasket
- ⊞ Supplied with sealing grommets for panel fixing screws (M6 thread recommended)
- ⊞ EXP-0992 heavy duty Sealing Cap available separately to maintain IP68 rating of unmated connectors
- ⊞ Mate with EXP-0911 and EXP-A911 Series Flex Connectors

// General Information:

| | |
|---------------------------------|---|
| Product Display Title: | Flange Mount Connectors for hazardous areas |
| Product Family: | Circular Power Connectors |
| Product Series: | EXPLora |
| Approvals: | UL |
| Body Material: | Polyester (PET) |
| Body Material Type: | Plastic Body |
| Contact Type: | Plug Contact |
| Coupling Type: | Screw |
| Current Max: | 18A |
| Diameter Over Coupling Ring Mm: | 58mm |
| Flamability Rating: | UL94V-0 |
| Function: | Flange Mount Connector |
| Ip Rating: | IP68 |
| Max Contact Accomodation Awg: | 14AWG |
| Min Contact Accomodation Awg: | 10AWG |
| Max Contact Accomodation Mm2: | 4mm2 |
| Min Contact Accomodation Mm2: | 2.5mm2 |
| Max Operating Temperature: | +55°C |
| Min Operating Temperature: | -20°C |
| Number Of Contacts: | 2 Contacts |
| Voltage Max: | 600V |

// Product PDF Links
[EXPLora Series power connectors...](#)
// Product 3D CAD Model Links
[EXP-0941/02/P3D CAD Model](#)