
EXP-A911/03/S/9 Datasheet



Product Name // Flex Cable Connector Large Cable EXP-A911 Series 3 Contact Socket 18mm-20mm Cable (Black Gland)





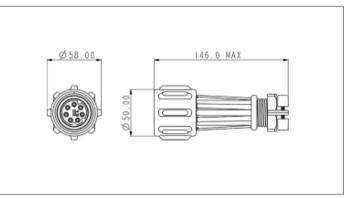

// Product Description:

- 0 Flex Cable Connectors for hazardous areas
- 0 Water and dustproof to IP68 when mated with compatible connector
- 0 Positive fast-acting locking ring - can be turned with a gloved hand
- 0 Plug or Socket
- 0 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version
- Screw Terminals

- Choice of cable acceptance 7mm-22mm diameter depending on part code (see data for details):
- EXP-09 part codes 7mm-15mm diameter
- EXP-A9 part codes (large cable version with strain relief clamp) 14mm-22mm diameter
- 0 Packs of Cable Glands for differing cable diameters available separately (EXP-0980, EXP-A980)
- 0 EXP-0990 heavy duty Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with EXP-09 or EXP-A9 Series Flex and Panel Mounting Connectors, as appropriate

General Information:

Product Display Title: Product Family:

Product Series:

Approvals:

Body Material:

Body Material Type:

Contact Type:

Coupling Type: **Current Max:**

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Min Contact Accomodation Awa: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts: Voltage Max:

Flex Cable Connectors for hazardous areas

Circular Power Connectors **EXPlora**

UL

Polyester (PET)

Plastic Body

Socket Contact Screw

18A

58mm

UL94V-0

Flex Cable Connector

IP68

20mm 18mm

14AWG

10AWG

4mm2

2.5mm2

+55°C -20°C

600V

3 Contacts

// Product PDF Links



// Product 3D CAD Model Links



EXP-A911/03/S/93D CAD Model