


FX0180 Datasheet

Product Name // Fuseholder Protection Category PC1 In-Line Clear Screw Termination 6.3mm x 32mm Fuse

 [View Product Page](#)

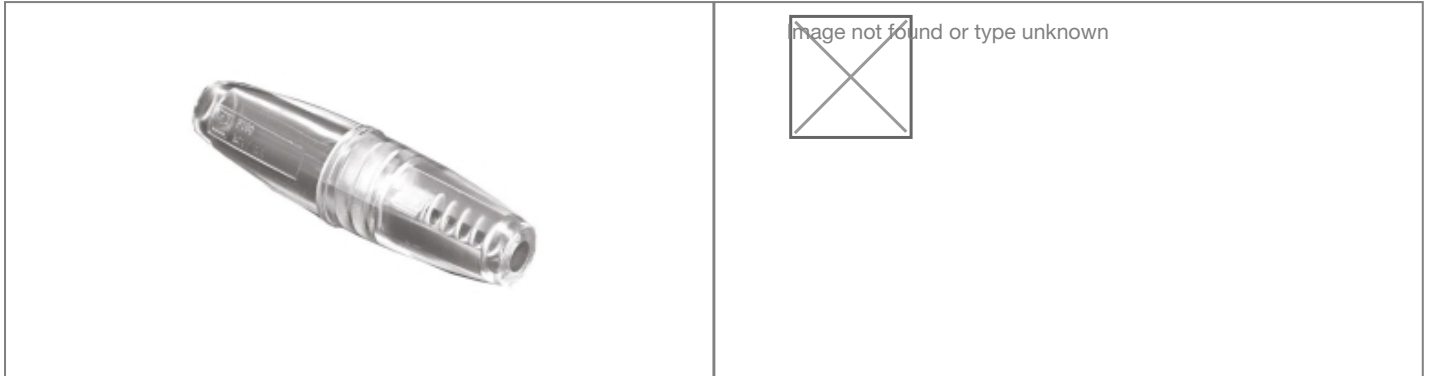


// Product Description:

- ⦿ Protection Category PC1 In-Line Fuseholders
- ⦿ Screw Termination
- ⦿ Part codes prefixed FX0385, FX0285, FX0185 are IP66 Sealed
- ⦿ Choice of fuse size depending on part code:
- ⦿ Part codes prefixed FX0380, FX0385 - 5mm x 20mm fuse
- ⦿ Part codes prefixed FX0280, FX0285 - 6.3mm x 25mm fuse
- ⦿ Part codes prefixed FX0180, FX0185 - 6.3mm x 32mm fuse
- ⦿ Choice of colour depending on part code: Black (part codes suffixed /BK) or Clear (no suffix)
- ⦿ Part codes prefixed FX0380, FX0280, FX0180 have 4.8mm diameter cable entry
- ⦿ Part codes prefixed FX0385, FX0285, FX0185 have three stage stepped grommet accomodating cable diameters: 2mm - 2.64mm, 1.5mm - 1.9mm, 1mm - 1.4mm


// General Information:

Product Display Title:	Protection Category PC1 In-Line Fuseholders
Product Family:	Fuseholders
Product Series:	In-Line PC1 and In-Line Sealed to IP66, PC1
Body Material:	Polybutene (PB-1)
Current Max:	10A
Flamability Rating:	UL94HB
Function:	Pc1 Fuseholder
Fuseholder Colour:	Clear
Fuseholder Protection Category:	PC1
Fuse Size:	6.3mm x 32mm
Max Operating Temperature:	+90°C
Min Operating Temperature:	-20°C
Voltage Max:	50V

// Product PDF Links

 [Fuseholders product data](#)

// Product 3D CAD Model Links

 [FX01803D CAD Model](#)