


FX0380/BK Datasheet

Product Name // Fuseholder Protection Category PC1 In-Line Black Screw Termination 5mm x 20mm Fuse

[View Product Page](#)

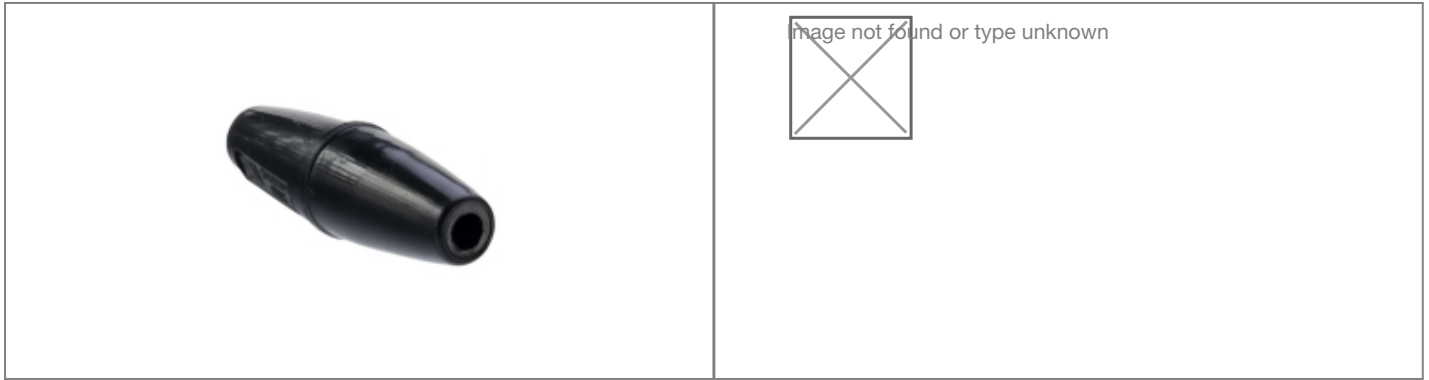

// Product Description:

- ⊗ Protection Category PC1 In-Line Fuseholders
- ⊗ Screw Termination
- ⊗ Part codes prefixed FX0385, FX0285, FX0185 are IP66 Sealed
- ⊗ Choice of fuse size depending on part code:
- ⊗ Part codes prefixed FX0380, FX0385 - 5mm x 20mm fuse
- ⊗ Part codes prefixed FX0280, FX0285 - 6.3mm x 25mm fuse
- ⊗ Part codes prefixed FX0180, FX0185 - 6.3mm x 32mm fuse
- ⊗ Choice of colour depending on part code: Black (part codes suffixed /BK) or Clear (no suffix)
- ⊗ Part codes prefixed FX0380, FX0280, FX0180 have 4.8mm diameter cable entry
- ⊗ Part codes prefixed FX0385, FX0285, FX0185 have three stage stepped grommet accomodating cable diameters: 2mm - 2.64mm, 1.5mm - 1.9mm, 1mm - 1.4mm

// General Information:

Product Display Title:	Protection Category PC1 In-Line Fuseholders
Product Family:	Fuseholders
Product Series:	In-Line PC1 and In-Line Sealed to IP66, PC1
Change Notes:	MK-009078-SL-
Approvals:	UL
Body Material:	Nylon 66
Current Max:	10A
Flamability Rating:	UL94V-0
Function:	Pc1 Fuseholder
Fuseholder Colour:	Black
Fuseholder Protection Category:	PC1
Fuse Size:	5mm x 20mm
Max Operating Temperature:	+90°C
Min Operating Temperature:	-20~∞C
Voltage Max:	50V

// Product PDF Links

[Fuseholders product data](#)

// Product 3D CAD Model Links

[FX0380/BK3D CAD Model](#)

// Product Certificate Links

[UL E60600 Certificate - Black...](#)