
PF0002/28/GY Datasheet



Product Name // IEC Connector Flange Mount Fused Inlet with Isolated Fuse Contacts PF0002 Series Grey 2.8mm Solder Tag Termination EN60 320-1 Standard Sheet C14 Class I





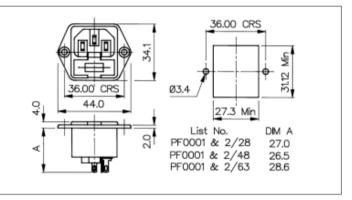

// Product Description:

- 0 Flange Mount Fused IEC Inlets
- 0 EN60 320-1 Standard Sheet C14 Class I
- 0 Cold Condition
- 0 Single 5mm x 20mm fuse with spare fuse facility
- 0 Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab, /PC - Horizontal **PCB Spills**
- Choice of colour depending on part code: /WH White, /GY -Grey, no suffix - Black (some approvals apply to specific colours only - see data for details)
- Insulation Boot for rear of connector available separately (part code 11987) for all versions except PCB Mount
- Retaining Clip KT0009 available separately for all versions (for use with PX0587 Female Connector only) to prevent accidental removal of mating connector (can be used with Front of Panel Mount only for PCB Mount versions)
- 0 Mate with PX0587, PX0587/SE, PX0588
- 0 PF0002 Series also available; connectors are same specification as PF0001 Series but with fuse contacts isolated (PF0002 Series not available in PCB Mount versions)

// General Information:

Product Display Title:

Product Family:

Product Series: Approvals:

Body Material:

Current Max:

Flamability Rating:

Function:

lec Connector Colour:

lec Connector Mates With:

lec En60620 Type:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts:

Voltage Max:

Flange Mount Fused IEC Inlets

IEC Connectors

IEC60320 Main Inlets and Outlets

CSA, UL Nylon 66

10A

UL94V-0

Flange Mount Fused Connector

PX0587,PX0587/SE,PX0588

EN60 320-1 Standard Sheet C14 Class I

+70°C

-40°C

3 Contacts

250V

// Product PDF Links



IEC Connectors product data

// Product 3D CAD Model Links



PF0002/28/GY3D CAD Model