
PF0011/30/28 Datasheet



Product Name // IEC Connector Snap Fit To Panel Fused Inlet PF0011 Series 3mm Panel Black 2.8mm Solder Tag Termination EN60 320-1 Standard Sheet C14 Class I





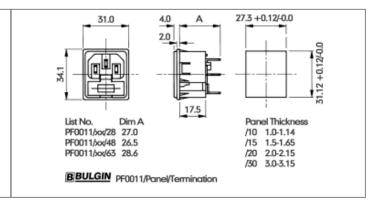

// Product Description:

- 0 Snap Fit Panel Mount Fused IEC Inlets
- 0 EN60 320-1 Standard Sheet C14 Class I
- O Cold Condition
- 0 Single 5mm x 20mm fuse with spare fuse facility
- Choice of panel thickness depending on part code: /10 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm
- Choice of Termination depending on part code: /28 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab, /PC - PCB Spills
- O Choice of colour depending on part code: /WH White, /GY -Grey, no suffix - Black (some approvals apply to specific colours only - see data for details)
- O Insulation Boot for rear of connector available separately (part code 11987) for all versions except PCB Mount
- Mate with PX0587, PX0587/SE, PX0588

General Information:

Product Display Title: Product Family:

Product Series:

Is Vitalis:

Approvals:

Body Material: Current Max:

Flamability Rating:

Function:

lec Connector Colour: lec Connector Mates With:

lec En60620 Type:

Max Operating Temperature: Min Operating Temperature: Max Panel Thickness:

Number Of Contacts:

Min Panel Thickness: Voltage Max:

Snap Fit Panel Mount Fused IEC Inlets

IFC Connectors

IEC60320 Main Inlets and Outlets

CSA, ENEC, UL, VDE, CCC

Nylon 66 10A UL94V-0

Panel Mount Fused Connector

Black

PX0587,PX0587/SE,PX0588

EN60 320-1 Standard Sheet C14 Class I

+70°C -40°C 3mm 3mm 3 Contacts

250V

// Product PDF Links

// Product 3D CAD Model Links

