
# PF0011/30/28 Datasheet

## Product Name // IEC Connector Snap Fit To Panel Fused Inlet PF0011 Series 3mm Panel Black 2.8mm Solder Tag Termination EN60 320-1 Standard Sheet C14 Class I

View Product Page



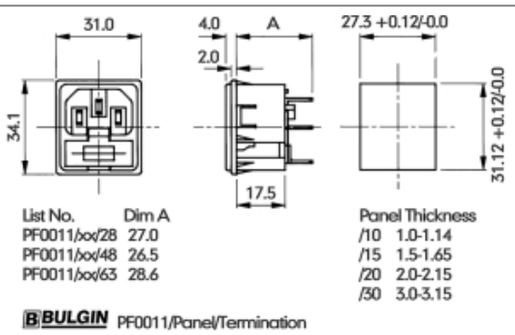


## // Product Description:

- Snap Fit Panel Mount Fused IEC Inlets
- EN60 320-1 Standard Sheet C14 Class I
- Cold Condition
- Single 5mm x 20mm fuse with spare fuse facility
- Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm
- Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab, /PC - PCB Spills
- Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colours only - see data for details)
- Insulation Boot for rear of connector available separately (part code 11987) for all versions except PCB Mount
- Mate with PX0587, PX0587/SE, PX0588

## // General Information:

| | |
|---|---|
| **Product Display Title:** | Snap Fit Panel Mount Fused IEC Inlets |
| **Product Family:** | IEC Connectors |
| **Product Series:** | IEC60320 Main Inlets and Outlets |
| **Approvals:** | CSA, ENEC, UL, VDE, CCC |
| **Body Material:** | Nylon 66 |
| **Current Max:** | 10A |
| **Flamability Rating:** | UL94V-0 |
| **Function:** | Panel Mount Fused Connector |
| **Iec Connector Colour:** | Black |
| **Iec Connector Mates With:** | PX0587,PX0587/SE,PX0588 |
| **Iec En60620 Type:** | EN60 320-1 Standard Sheet C14 Class I |
| **Max Operating Temperature:** | +70°C |
| **Min Operating Temperature:** | -40°C |
| **Max Panel Thickness:** | 3mm |
| **Min Panel Thickness:** | 3mm |
| **Number Of Contacts:** | 3 Contacts |
| **Voltage Max:** | 250V |

### // Product PDF Links

IEC Connectors product data

### // Product 3D CAD Model Links

PF0011/30/283D CAD Model