


PF0011/30/63/GY Datasheet

Product Name // IEC Connector Snap Fit To Panel Fused
Inlet PF0011 Series 3mm Panel Grey 6.3mm Tab
Termination EN60 320-1 Standard Sheet C14 Class I

 [View Product Page](#)



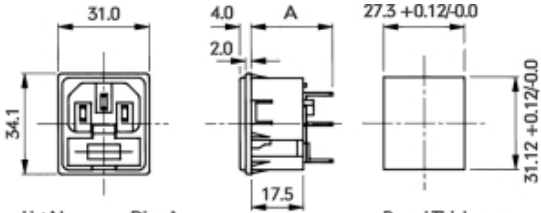

List No.	Dim A
PF0011/xx/28	27.0
PF0011/xx/48	26.5
PF0011/xx/63	28.6

Panel Thickness	
/10	1.0-1.14
/15	1.5-1.65
/20	2.0-2.15
/30	3.0-3.15

BULGIN PF0011/Panel/Termination

// **Product Description:**

- Snap Fit Panel Mount Fused IEC Inlets
 - EN60 320-1 Standard Sheet C14 Class I
 - Cold Condition
 - Single 5mm x 20mm fuse with spare fuse facility
 - Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm
- Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab, /PC - PCB Spills
 - Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colours only - see data for details)
 - Insulation Boot for rear of connector available separately (part code 11987) for all versions except PCB Mount
 - Mate with PX0587, PX0587/SE, PX0588

// **General Information:**

Product Display Title:	Snap Fit Panel Mount Fused IEC Inlets
Product Family:	IEC Connectors
Product Series:	IEC60320 Main Inlets and Outlets
Approvals:	CSA, UL, CCC
Body Material:	Nylon 66
Current Max:	10A
Flamability Rating:	UL94V-0
Function:	Panel Mount Fused Connector
Iec Connector Colour:	Grey
Iec Connector Mates With:	PX0587,PX0587/SE,PX0588
Iec En60620 Type:	EN60 320-1 Standard Sheet C14 Class I
Max Operating Temperature:	+70°C
Min Operating Temperature:	-40°C
Max Panel Thickness:	3mm
Min Panel Thickness:	3mm
Number Of Contacts:	3 Contacts
Voltage Max:	250V

// **Product PDF Links**

 [IEC Connectors product data](#)

// **Product 3D CAD Model Links**

 [PF0011/30/63/GY3D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)