
# PF0016/20/48/WH Datasheet



# Product Name // IEC Connector Snap Fit To Panel Fused Inlet 2 Pin PF0016 Series 2mm Panel White 4.8mm Tab Termination EN60 320-1 Standard Sheet C18 Class II





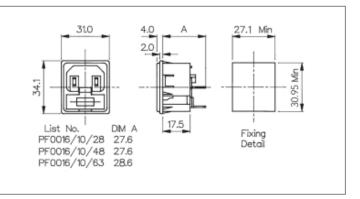

## // Product Description:

- O Snap Fit Panel Mount Fused IEC Inlets
- O EN60 320-1 Standard Sheet C18 Class II
- O Cold Condition
- O Two Pin Class II (no Earth pin)
- Single 5mm x 20mm fuse

- Choice of panel thickness depending on part code: /10 1mm, /15 1.5mm, /20 2mm, /30 3mm
- Choice of Termination depending on part code: /28 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab
- O Choice of colour depending on part code: /WH White, /GY Grey, no suffix Black (some approvals apply to specific colours only see data for details)
- O Insulation Boot for rear of connector available separately (part code 11987)
- Mate with PX0587, PX0587/SE, PX0588

### // General Information:

Product Display Title: Product Family:

Draduct Carin

Product Series:

Approvals: Body Material:

Current Max:

Flamability Rating:

Function:

lec Connector Colour:

lec Connector Mates With:

lec En60620 Type:

Max Operating Temperature:
Min Operating Temperature:

Max Panel Thickness:

Min Panel Thickness:

Number Of Contacts:

Voltage Max:

Snap Fit Panel Mount Fused IEC Inlets

IEC Connectors

IEC60320 Main Inlets and Outlets

CSA, UL, RCM Nylon 66

10A

UL94V-0

Panel Mount Fused Connector

White

PX0587,PX0587/SE,PX0588

EN60 320-1 Standard Sheet C18 Class II

+70°C

-40°C

2mm

2mm 2 Contacts

250V

#### // Product PDF Links



#### // Product 3D CAD Model Links



PF0016/20/48/WH3D CAD Model