
## PF0030/63 Datasheet



## Product Name // IEC Connector Flange Mount Twin Fused Inlet PF0030 Series 6.3mm Tab Termination EN60 320-1 Standard Sheet C14 Class I





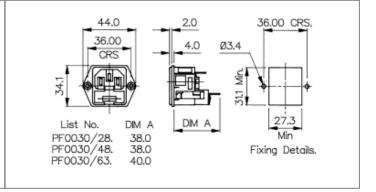

## // Product Description:

- C Flange Mount Twin Fused IEC Inlets
- O EN60 320-1 Standard Sheet C14 Class I
- O Cold Condition
- O Twin Fused, 5mm x 20mm fuses

- Choice of Termination depending on part code: /28 2.8mm Solder Tag, /48 - 4.8mm Tab, /PC - PCB Spills
- O Insulation Boot for rear of connector available separately (part code 14317) for all versions except PCB Mount
- Retaining Clip KT0009 available separately for all versions except PCB Mount to prevent accidental removal of mating connector (for use with PX0587 Female Connector only)
- Mate with PX0587, PX0587/SE, PX0588

## // General Information:

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Material:

Current Max:

Flamability Rating: Function:

lec Connector Mates With:

lec En60620 Type:

Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts:

Voltage Max:

Flange Mount Twin Fused IEC Inlets

IEC Connectors

IEC60320 Main Inlets and Outlets

CSA

Nylon 66

10A

UL94V-0

Flange Mount Fused Connector

PX0587,PX0587/SE,PX0588

EN60 320-1 Standard Sheet C14 Class I

+70°C

-20°C

3 Contacts 250V

// Product PDF Links

IEC Connectors product data

// Product 3D CAD Model Links



// Product Certificate Links

UL E92187 Certificate - PF0030