# PPCEGG0003CLL Datasheet




## Product Name // 3 Contacts Fixed Socket 00 Series Push **Pull Connector**

View Product Page

#### \* Representative product image only



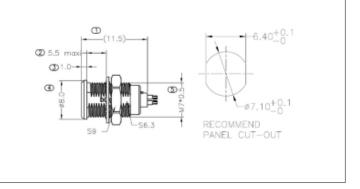

#### // Product Description:

- 0 3 Contacts Fixed Socket 00 Series Push Pull Connector
- 0 M7x0.5mm Thread
- 0 Nut installation 1Nm
- 0 ROHS compliance
- 0 Available in Straight Plug version
- 0 IP50 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test>144h
- 0 High packing density for space savings on panel mounts

### // General Information:

**Product Display Title:** 

**Product Family: Product Series:** Push Pull Connectors X Series

Contact Pin Material:

**Coupling Nut Retention Force: Current Max:** 

Diameter Over Coupling Ring Mm:

**Durability:** Fixing Nut Material:

Function:

Insulator: Ip Rating: Max Contact Accomodation Awg:

Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: **Number Of Contacts:** Operating Humidity:

Panel Cut Out: Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage: **Push Pull Connector Series: Rohs Compliant:** Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max:

Thread Size: Vibration Resistance Min: Vibration Resistance Max:

**Shock Resistance:** 

**Terminal Diameter:** 

00 Series Fixed Socket Push Pull Connector

Circular Automation Connectors Phosphor bronze gold plated 3u"

1Nm ЗА 8mm >4500 cycles

Nickel Plated brass

Fixed Socket Push Pull Connector **PPS** 

IP50 30AWG 0.05mm2 +200°C -50°C 5.5mm 3 Contacts 0.95

7.10mmx6.40mm

800V 950V 00 Series Yes 48h 75dB 40dB 100g 0.5mm M7x0.5mm 10Hz 2000Hz

// Product PDF Links

Push-Pull Connector X Series..

// Product 3D CAD Model Links

PPCEGG0003CLL3D CAD Model