
PPCEGG0004CLL Datasheet



Product Name // 4 Contacts Fixed Socket 00 Series Push Pull Connector

View Product Page

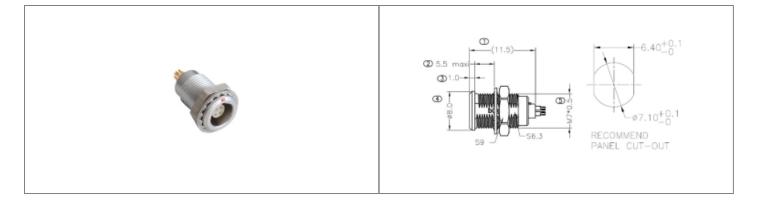

// Product Description:

- 4 Contacts Fixed Socket 00 Series Push Pull Connector
- M7x0.5mm Thread
- O Nut installation 1Nm
- O ROHS compliance
- Available in Straight Plug version
- O IP50 rated

Ip Rating:

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- O Salt Spray Corrosion Test>144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title: 00 Series Fixed Socket Push Pull Connector

2A

IP50

Product Family: Circular Automation Connectors
Product Series: Push Pull Connectors X Series

Contact Pin Material:Phosphor bronze gold plated 3u"Coupling Nut Retention Force:1Nm

Current Max:

Diameter Over Coupling Ring Mm: 8mm

Durability: >4500 cycles

Fixing Nut Material:

Fixed Socket Push Pull Connector Insulator:

PPS

Max Contact Accomodation Awg:30AWGMax Contact Accomodation Mm2:0.05mm2Max Operating Temperature:+200°CMin Operating Temperature:-50°CMax Panel Thickness:5.5mmNumber Of Contacts:4 Contacts

Operating Humidity: 0.95
Panel Cut Out: 7.10mmx6.40mm

Pin Pin Terminal Voltage:800VPin Shell Terminal Voltage:650VPush Pull Connector Series:00 SeriesRohs Compliant:YesSalt Spray Corrosion Test:48hShielding Efficiency Min:75dB

Shielding Efficiency Min:

Shielding Efficiency Max:

Shock Resistance:

100g

Terminal Diameter:

0.5mm

Thread Size:

M7x0.5mm

Vibration Resistance Min:

10Hz

// Product PDF Links

Push-Pull Connector X Series...

Vibration Resistance Max:

// Product 3D CAD Model Links

2000Hz