
PPCEGG0B02CLL Datasheet



Product Name // 2 Contacts Fixed Socket 0X Series Push Pull Connector





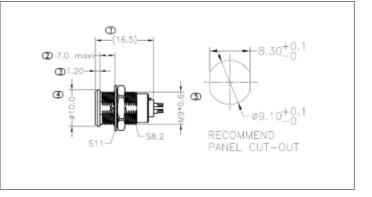

// Product Description:

- 2 Contacts Fixed Socket 0X Series Push Pull Connector
- M9x0.6mm Thread
- O Nut installation 2.5Nm
- O Available in Straight Plug version
- ROHS compliance
- O IP50 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function: Insulator:

Ip Rating:

Max Contact Accomodation Awg:
Max Contact Accomodation Mm2:
Max Operating Temperature:
Min Operating Temperature:
Max Panel Thickness:

Max Panel Thickness: Number Of Contacts: Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage: Push Pull Connector Series: Rohs Compliant: Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max:

Thread Size: Vibration Resistance Min: Vibration Resistance Max:

Shock Resistance:

Terminal Diameter:

0X Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors X Series Phosphor bronze gold plated 3u"

2.5Nm 10A 10mm >4500 cycles

Nickel Plated brass

Fixed Socket Push Pull Connector PPS

IP50 22AWG 0.34mm2 +200°C -50°C 7.0 mm 2 Contacts 0.95

9.10mmx8.30mm

1300V 1050V 0X Series Yes 48h 75dB 40dB 100g 0.9mm M9x0.6mm 10Hz 2000Hz

// Product PDF Links



// Product 3D CAD Model Links

