PPCEGG0B03CLL Datasheet




Product Name // 3 Contacts Fixed Socket 0X Series Push Pull Connector



* Representative product image only



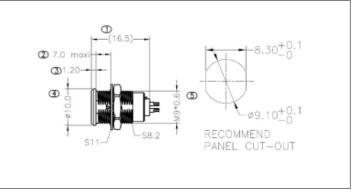

// Product Description:

- O 3 Contacts Fixed Socket 0X Series Push Pull Connector
- M9x0.6mm Thread
- O Nut installation 2.5Nm
- O Available in Straight Plug version
- ROHS compliance
- O IP50 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- O Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature:

Max Panel Thickness: Number Of Contacts: Operating Humidity:

Panel Cut Out:
Pin Pin Terminal Voltage:
Pin Shell Terminal Voltage:

Pin Shell Terminal Voltage: Push Pull Connector Series: Rohs Compliant: Salt Spray Corrosion Test:

Salt Spray Corrosion Test Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: Terminal Diameter: Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 0X Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors X Series Phosphor bronze gold plated 3u"

2.5Nm 8A 10mm >4500 cycles

Nickel Plated brass

Fixed Socket Push Pull Connector PPS

IP50 22AWG 0.34mm2 +200°C -50°C 7.0 mm 3 Contacts 0.95

9.10mmx8.30mm

1200V 900V 0X Series Yes 48h 75dB 40dB 100g 0.9mm M9x0.6mm 10Hz 2000Hz

// Product PDF Links

Push-Pull Connector X Series...

// Product 3D CAD Model Links

PPCEGG0B03CLL3D CAD Model