


# PPCEGG0B04CLL Datasheet

## Product Name // 4 Contacts Fixed Socket 0X Series Push Pull Connector

[View Product Page](#)

\* Representative product image only

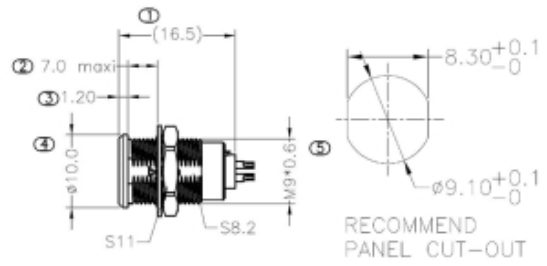

### // Product Description:

- ⊞ 4 Contacts Fixed Socket 0X Series Push Pull Connector
- ⊞ M9x0.6mm Thread
- ⊞ Nut installation 2.5Nm
- ⊞ Available in Straight Plug version
- ⊞ ROHS compliance
- ⊞ IP50 rated
- ⊞ Temp:-50 C to +200 C
- ⊞ Solder Terminals
- ⊞ Durability >4500 cycles
- ⊞ Operating humidity up to 95%
- ⊞ Salt Spray Corrosion Test >144h
- ⊞ High packing density for space savings on panel mounts

### // General Information:

Product Display Title:	0X Series Fixed Socket Push Pull Connector
Product Family:	Circular Automation Connectors
Product Series:	Push Pull Connectors X Series
Contact Pin Material:	Phosphor bronze gold plated 3u"
Coupling Nut Retention Force:	2.5Nm
Current Max:	7A
Diameter Over Coupling Ring Mm:	10mm
Durability:	>4500 cycles
Fixing Nut Material:	Nickel Plated brass
Function:	Fixed Socket Push Pull Connector
Insulator:	PPS
Ip Rating:	IP50
Max Contact Accomodation Awg:	22AWG
Max Contact Accomodation Mm2:	0.34mm <sup>2</sup>
Max Operating Temperature:	+200°C
Min Operating Temperature:	-50°C
Max Panel Thickness:	7.0 mm
Number Of Contacts:	4 Contacts
Operating Humidity:	0.95
Panel Cut Out:	9.10mmx8.30mm
Pin Pin Terminal Voltage:	850V
Pin Shell Terminal Voltage:	700V
Push Pull Connector Series:	0X Series
Rohs Compliant:	Yes
Salt Spray Corrosion Test:	48h
Shielding Efficiency Min:	75dB
Shielding Efficiency Max:	40dB
Shock Resistance:	100g
Terminal Diameter:	0.7mm
Thread Size:	M9x0.6mm
Vibration Resistance Min:	10Hz
Vibration Resistance Max:	2000Hz

#### // Product PDF Links

[Push-Pull Connector X Series...](#)

#### // Product 3D CAD Model Links

[PPCEGG0B04CLL3D CAD Model](#)


Have a question or project enquiry  
you'd like to talk to us about?



[Click Here To Contact Us](#)