PPCEGG0B04CLL Datasheet




Product Name // 4 Contacts Fixed Socket 0X Series Push **Pull Connector**

View Product Page

* Representative product image only



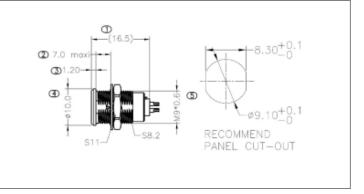

// Product Description:

- 0 4 Contacts Fixed Socket 0X Series Push Pull Connector
- 0 M9x0.6mm Thread
- 0 Nut installation 2.5Nm
- 0 Available in Straight Plug version
- 0 ROHS compliance
- 0 IP50 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature:

Min Operating Temperature: Max Panel Thickness: **Number Of Contacts:**

Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:**

Rohs Compliant: Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance: Terminal Diameter:** Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 0X Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors X Series Phosphor bronze gold plated 3u"

2.5Nm 7A 10mm

PPS

>4500 cycles Nickel Plated brass

Fixed Socket Push Pull Connector

IP50 22AWG 0.34mm2 +200°C -50°C 7.0 mm 4 Contacts 0.95

9.10mmx8.30mm

850V 700V 0X Series Yes 48h 75dB 40dB 100g 0.7mm M9x0.6mm 10Hz 2000Hz

// Product PDF Links

Push-Pull Connector X Series..

// Product 3D CAD Model Links

PPCEGG0B04CLL3D CAD Model