PPCEGG0B05CLL Datasheet




Product Name // 5 Contacts Fixed Socket 0X Series Push Pull Connector

View Product Page

* Representative product image only



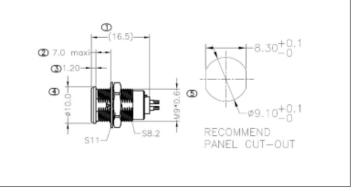

// Product Description:

- 5 Contacts Fixed Socket 0X Series Push Pull Connector
- M9x0.6mm Thread
- O Nut installation 2.5Nm
- O Available in Straight Plug version
- ROHS compliance
- O IP50 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series:

Contact Pin Material:
Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function: Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature:

Min Operating Temperature: Max Panel Thickness: Number Of Contacts:

Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: Push Pull Connector Series:

Rohs Compliant:
Salt Spray Corrosion Test:
Shielding Efficiency Min:
Shielding Efficiency Max:
Shock Resistance:
Terminal Diameter:
Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 0X Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors X Series Phosphor bronze gold plated 3u"

2.5Nm 6.5A 10mm >4500 cycles

Nickel Plated brass

Fixed Socket Push Pull Connector PPS

IP50 22AWG 0.34mm2 +200°C -50°C 7.0 mm 5 Contacts 0.95

9.10mmx8.30mm

1000V 700V 0X Series Yes 48h 75dB 40dB 100g 0.7mm M9x0.6mm 10Hz 2000Hz

// Product PDF Links



// Product 3D CAD Model Links

