


PPCEGG0B05CLL Datasheet

Product Name // 5 Contacts Fixed Socket 0X Series Push Pull Connector

[View Product Page](#)

* Representative product image only

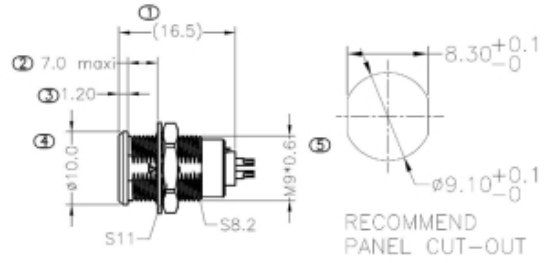

// Product Description:

- ⊞ 5 Contacts Fixed Socket 0X Series Push Pull Connector
- ⊞ M9x0.6mm Thread
- ⊞ Nut installation 2.5Nm
- ⊞ Available in Straight Plug version
- ⊞ ROHS compliance
- ⊞ IP50 rated
- ⊞ Temp:-50 C to +200 C
- ⊞ Solder Terminals
- ⊞ Durability >4500 cycles
- ⊞ Operating humidity up to 95%
- ⊞ Salt Spray Corrosion Test >144h
- ⊞ High packing density for space savings on panel mounts

// General Information:

Product Display Title:	0X Series Fixed Socket Push Pull Connector
Product Family:	Circular Automation Connectors
Product Series:	Push Pull Connectors X Series
Contact Pin Material:	Phosphor bronze gold plated 3u"
Coupling Nut Retention Force:	2.5Nm
Current Max:	6.5A
Diameter Over Coupling Ring Mm:	10mm
Durability:	>4500 cycles
Fixing Nut Material:	Nickel Plated brass
Function:	Fixed Socket Push Pull Connector
Insulator:	PPS
Ip Rating:	IP50
Max Contact Accomodation Awg:	22AWG
Max Contact Accomodation Mm2:	0.34mm ²
Max Operating Temperature:	+200°C
Min Operating Temperature:	-50°C
Max Panel Thickness:	7.0 mm
Number Of Contacts:	5 Contacts
Operating Humidity:	0.95
Panel Cut Out:	9.10mmx8.30mm
Pin Pin Terminal Voltage:	1000V
Pin Shell Terminal Voltage:	700V
Push Pull Connector Series:	0X Series
Rohs Compliant:	Yes
Salt Spray Corrosion Test:	48h
Shielding Efficiency Min:	75dB
Shielding Efficiency Max:	40dB
Shock Resistance:	100g
Terminal Diameter:	0.7mm
Thread Size:	M9x0.6mm
Vibration Resistance Min:	10Hz
Vibration Resistance Max:	2000Hz

// Product PDF Links

[Push-Pull Connector X Series...](#)

// Product 3D CAD Model Links

[PPCEGG0B05CLL3D CAD Model](#)