PPCEGG0K06CLL Datasheet




Product Name // 6 Contacts Fixed Socket 0Y Series Push Pull Connector

View Product Page

* Representative product image only



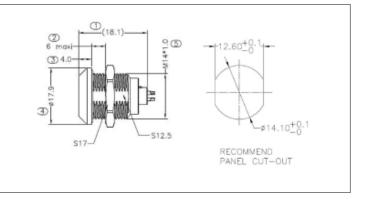

// Product Description:

- O 6 Contacts Fixed Socket 0Y Series Push Pull Connector
- O M14x1.0mm Thread
- O Nut Installation torque 5.0Nm
- O Available in Straight Plug version
- ROHS compliance
- O IP66 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series:

Coupling Nut Petentian Force

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness:

Number Of Contacts: Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage: Push Pull Connector Series: Rohs Compliant: Salt Spray Corrosion Test:

Salt Spray Corrosion Test Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: Terminal Diameter: Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 0Y Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series Phosphor bronze gold plated 3u"

5Nm 2.5A 17.9mm >4500 cycles

PPS

Nickel Plated brass Fixed Socket Push Pull Connector

IP66 28AWG 0.08mm2 +200°C -50°C 6.0mm 6 Contacts

0.95 14.10mmx12.60mm

850V 650V 0Y Series Yes 48h 95dB 80dB 100g 0.5mm

M14x1.0mm 10Hz 2000Hz

// Product PDF Links



// Product 3D CAD Model Links

