# **PPCEGG0K06CLL Datasheet**




## Product Name // 6 Contacts Fixed Socket 0Y Series Push **Pull Connector**

View Product Page

#### \* Representative product image only



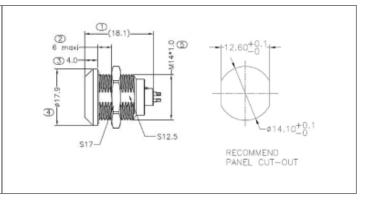

#### // Product Description:

- 0 6 Contacts Fixed Socket 0Y Series Push Pull Connector
- 0 M14x1.0mm Thread
- 0 Nut Installation torque 5.0Nm
- 0 Available in Straight Plug version
- 0 ROHS compliance
- 0 IP66 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** Contact Pin Material:

**Coupling Nut Retention Force:** 

**Current Max:** 

Diameter Over Coupling Ring Mm:

**Durability:** 

Fixing Nut Material:

Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: **Number Of Contacts:** 

Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage:

**Rohs Compliant:** 

**Push Pull Connector Series:** Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance: Terminal Diameter:** Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 0Y Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series Phosphor bronze gold plated 3u"

5Nm 2.5A

17.9mm

>4500 cycles Nickel Plated brass

Fixed Socket Push Pull Connector

**PPS** IP66 28AWG 0.08mm2 +200°C -50°C 6.0mm 6 Contacts 0.95

14.10mmx12.60mm

850V 650V 0Y Series Yes 48h 95dB 80dB 100g 0.5mm M14x1.0mm

10Hz 2000Hz

// Product PDF Links



// Product 3D CAD Model Links

