PPCEGG0K07CLL Datasheet




Product Name // 7 Contacts Fixed Socket 0Y Series Push **Pull Connector**

View Product Page

* Representative product image only



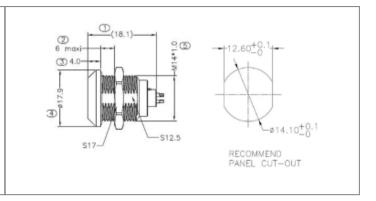

// Product Description:

- 0 7 Contacts Fixed Socket 0Y Series Push Pull Connector
- 0 M14x1.0mm Thread
- 0 Nut Installation torque 5.0Nm
- 0 Available in Straight Plug version
- 0 ROHS compliance
- 0 IP66 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

General Information:

Product Display Title:

Product Family:

Product Series:

Is Vitalis:

Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Max Contact Accomodation Awg:

Durability:

Fixing Nut Material:

Function: Insulator: Ip Rating:

Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness:

Number Of Contacts: Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:**

Rohs Compliant:

Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance: Terminal Diameter:** Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 0Y Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series

Phosphor bronze gold plated 3u"

5Nm 2.5A

17.9mm >4500 cycles Nickel Plated brass

Fixed Socket Push Pull Connector

IP66 28AWG 0.08mm2 +200°C -50°C 6.0mm 7 Contacts 0.95

14.10mmx12.60mm

800V 700V **0Y Series** Yes 48h 95dB 80dB 100g 0.5mm

10Hz 2000Hz

M14x1.0mm

// Product PDF Links



// Product 3D CAD Model Links

