PPCEGG1B04CLL Datasheet




Product Name // 4 Contacts Fixed Socket 1X Series Push **Pull Connector**

View Product Page

* Representative product image only



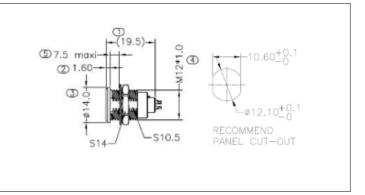

// Product Description:

- 0 4 Contacts Fixed Socket 1X Series Push Pull Connector
- 0 Nut installation 4.5Nm
- 0 Available in Straight Plug version
- 0 ROHS compliance
- 0 IP50 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series:

Contact Pin Material: **Coupling Nut Retention Force:**

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: **Number Of Contacts:**

Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:**

Rohs Compliant: Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance: Terminal Diameter:** Thread Size: Vibration Resistance Min:

Vibration Resistance Max:

1X Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors X Series Phosphor bronze gold plated 3u"

4.5Nm 10A 14mm

>4500 cycles Nickel Plated brass

Fixed Socket Push Pull Connector **PPS**

IP50 22AWG 0.34mm2 +200°C -50°C 7.5mm 4 Contacts 0.95

12.10mmx10.60mm

1350V 1450V 1X Series Yes 48h 75dB 40dB 100g 0.9mm M12x1.0mm 10Hz 2000Hz

// Product PDF Links

Push-Pull Connector X Series..

// Product 3D CAD Model Links

PPCEGG1B04CLL3D CAD Model