
# PPCEGG1B14CLL Datasheet



## Product Name // 14 Contacts Fixed Socket 1X Series Push

View Product Page

## Pull Connector

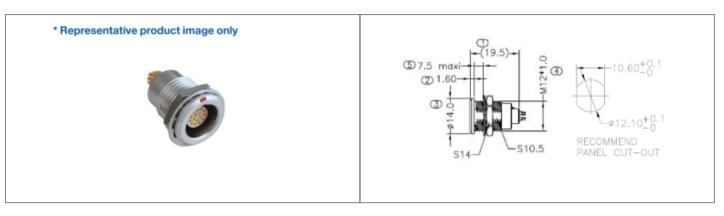

### // Product Description:

- O 14 Contacts Fixed Socket 1X Series Push Pull Connector
- O Nut installation 4.5Nm
- O Available in Straight Plug version
- O ROHS compliance
- O IP50 rated
- O Temp:-50 C to +200 C


- O Solder Terminals
- O Durability >4500 cycles
- O Operating humidity up to 95%
- O Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

#### // General Information:

**Product Display Title: Product Family: Product Series:** Is Vitalis: **Contact Pin Material: Coupling Nut Retention Force: Current Max:** Diameter Over Coupling Ring Mm: **Durability: Fixing Nut Material:** Function: Insulator: Ip Rating: Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: Number Of Contacts: **Operating Humidity:** Panel Cut Out: Pin Pin Terminal Voltage: **Pin Shell Terminal Voltage: Push Pull Connector Series: Rohs Compliant:** Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: **Terminal Diameter:** Thread Size: Vibration Resistance Min:

1X Series Fixed Socket Push Pull Connector **Circular Automation Connectors** Push Pull Connectors X Series No Phosphor bronze gold plated 3u" 4.5Nm 2A 14mm >4500 cycles Nickel Plated brass Fixed Socket Push Pull Connector PPS IP50 28AWG 0.08mm2 +200°C -50°C 7.5mm 14 Contacts 0.95 12.10mmx10.60mm 800V 1200V 1X Series Yes 48h 75dB 40dB 100g 0.5mm M12x1.0mm 10Hz





Click Here To Contact Us