
PPCEGG1K02CLL Datasheet



Product Name // 2 Contacts Fixed Socket 1Y Series Push **Pull Connector**

View Product Page



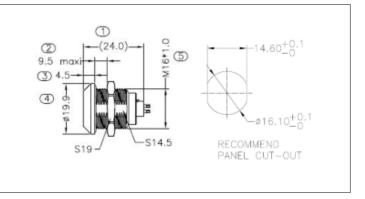

// Product Description:

- 0 2 Contacts Fixed Socket 1Y Series Push Pull Connector
- 0 M16x1.0mm Thread
- 0 Nut Installation torque 7.0Nm
- 0 Available in Straight Plug version
- 0 ROHS compliance
- 0 IP66 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function: Insulator:

Ip Rating:

Max Contact Accomodation Awg:

Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: **Number Of Contacts:** Operating Humidity:

Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:**

Rohs Compliant: Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance: Terminal Diameter:** Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 1Y Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series Phosphor bronze gold plated 3u"

7Nm

15A 19.9mm

>4500 cycles

Nickel Plated brass

Fixed Socket Push Pull Connector

PPS IP66 20AWG 0.50mm2 +200°C -50°C 9.5mm 2 Contacts 0.95

16.10mmx14.60mm

1500V 1350V 1Y Series Yes 48h 95dB 80dB 100g 1.3mm M16x1.0mm 10Hz

2000Hz

// Product PDF Links

Push-Pull Connector Y Series..

// Product 3D CAD Model Links

PPCEGG1K02CLL3D CAD Model