


# PPCEGG1K04CLL Datasheet

## Product Name // 4 Contacts Fixed Socket 1Y Series Push Pull Connector

[View Product Page](#)

\* Representative product image only

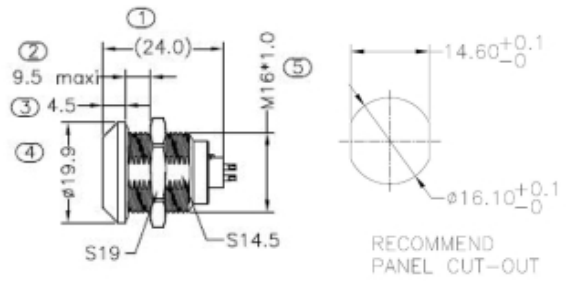

### // Product Description:

- ⊕ 4 Contacts Fixed Socket 1Y Series Push Pull Connector
- ⊕ M16x1.0mm Thread
- ⊕ Nut Installation torque 7.0Nm
- ⊕ Available in Straight Plug version
- ⊕ ROHS compliance
- ⊕ IP66 rated
- ⊕ Temp:-50 C to +200 C
- ⊕ Solder Terminals
- ⊕ Durability >4500 cycles
- ⊕ Operating humidity up to 95%
- ⊕ Salt Spray Corrosion Test >144h
- ⊕ High packing density for space savings on panel mounts

### // General Information:

Product Display Title:	1Y Series Fixed Socket Push Pull Connector
Product Family:	Circular Automation Connectors
Product Series:	Push Pull Connectors Y Series
Contact Pin Material:	Phosphor bronze gold plated 3u"
Coupling Nut Retention Force:	7Nm
Current Max:	10A
Diameter Over Coupling Ring Mm:	19.9mm
Durability:	>4500 cycles
Fixing Nut Material:	Nickel Plated brass
Function:	Fixed Socket Push Pull Connector
Insulator:	PPS
Ip Rating:	IP66
Max Contact Accomodation Awg:	22AWG
Max Contact Accomodation Mm2:	0.34mm2
Max Operating Temperature:	+200°C
Min Operating Temperature:	-50°C
Max Panel Thickness:	9.5mm
Number Of Contacts:	4 Contacts
Operating Humidity:	0.95
Panel Cut Out:	16.10mmx14.60mm
Pin Pin Terminal Voltage:	1350V
Pin Shell Terminal Voltage:	1450V
Push Pull Connector Series:	1Y Series
Rohs Compliant:	Yes
Salt Spray Corrosion Test:	48h
Shielding Efficiency Min:	95dB
Shielding Efficiency Max:	80dB
Shock Resistance:	100g
Terminal Diameter:	0.9mm
Thread Size:	M16x1.0mm
Vibration Resistance Min:	10Hz
Vibration Resistance Max:	2000Hz

#### // Product PDF Links

[Push-Pull Connector Y Series...](#)

#### // Product 3D CAD Model Links

[PPCEGG1K04CLL3D CAD Model](#)


Have a question or project enquiry  
you'd like to talk to us about?



[Click Here To Contact Us](#)