PPCEGG1K05CLL Datasheet




Product Name // 5 Contacts Fixed Socket 1Y Series Push Pull Connector

View Product Page

* Representative product image only



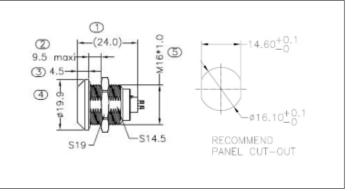

// Product Description:

- 5 Contacts Fixed Socket 1Y Series Push Pull Connector
- O M16x1.0mm Thread
- O Nut Installation torque 7.0Nm
- O Available in Straight Plug version
- O ROHS compliance
- O IP66 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness:

Number Of Contacts: Operating Humidity:

Panel Cut Out:

Pin Pin Terminal Voltage:
Pin Shell Terminal Voltage:
Push Pull Connector Series:
Page Compliant:

Rohs Compliant:
Salt Spray Corrosion Test:
Shielding Efficiency Min:
Shielding Efficiency Max:
Shock Resistance:
Terminal Diameter:
Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 1Y Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series Phosphor bronze gold plated 3u"

7Nm 9A

19.9mm

>4500 cycles

Nickel Plated brass

Fixed Socket Push Pull Connector

PPS IP66 22AWG 0.34mm2 +200°C -50°C 9.5mm 5 Contacts 0.95

16.10mmx14.60mm

1250V 1150V 1Y Series Yes 48h 95dB 80dB 100g 0.9mm M16x1.0mm 10Hz

2000Hz

// Product PDF Links

Push-Pull Connector Y Series...

// Product 3D CAD Model Links

PPCEGG1K05CLL3D CAD Model