PPCEGG1K14CLL Datasheet




Product Name // 14 Contacts Fixed Socket 1Y Series Push **Pull Connector**

View Product Page

* Representative product image only



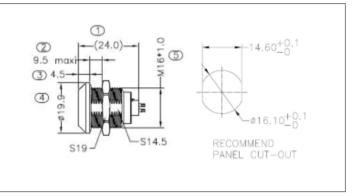

// Product Description:

- 0 14 Contacts Fixed Socket 1Y Series Push Pull Connector
- 0 M16x1.0mm Thread
- 0 Nut Installation torque 7.0Nm
- 0 Available in Straight Plug version
- 0 ROHS compliance
- 0 IP66 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

General Information:

Product Display Title:

Product Family:

Product Series:

Is Vitalis:

Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm: **Durability:**

Fixing Nut Material: Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: **Number Of Contacts:**

Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:**

Rohs Compliant:

Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance: Terminal Diameter:** Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 1Y Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series

Phosphor bronze gold plated 3u"

7Nm 2A

19.9mm

>4500 cycles

Nickel Plated brass

Fixed Socket Push Pull Connector

PPS IP66 28AWG 0.08mm2 +200°C -50°C 9.5mm 14 Contacts

0.95 16.10mmx14.60mm

800V 1200V 1Y Series Yes 48h 95dB 80dB

0.5mm M16x1.0mm 10Hz

2000Hz

100g

// Product PDF Links

Push-Pull Connector Y Series.

// Product 3D CAD Model Links

PPCEGG1K14CLL3D CAD Model

Click Here To Contact Us