PPCEGG2B03CLL Datasheet




Product Name // 3 Contacts Fixed Socket 2X Series Push Pull Connector

View Product Page

* Representative product image only



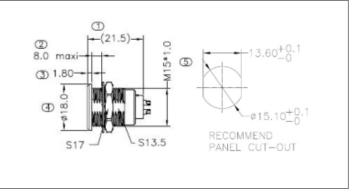

// Product Description:

- O 3 Contacts Fixed Socket 2X Series Push Pull Connector
- O M15x1.0mm Thread
- O Nut installation 6Nm
- O Available in Straight Plug version
- ROHS compliance
- O IP50 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- O Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness:

Number Of Contacts: Operating Humidity:

Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: Push Pull Connector Series:

Rohs Compliant:
Salt Spray Corrosion Test:
Shielding Efficiency Min:
Shielding Efficiency Max:
Shock Resistance:
Terminal Diameter:

Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 2X Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors X Series Phosphor bronze gold plated 3u"

6Nm 17A 18mm >4500 cycles

Nickel Plated brass

Fixed Socket Push Pull Connector PPS

IP50 16AWG 1.5mm2 +200°C -50°C 8.0mm 3 Contacts 0.95

15.10mmx13.60mm

2400V 1850V 2X Series Yes 48h 75dB 40dB 100g 1.6mm M15x1.0mm 10Hz 2000Hz

// Product PDF Links

Push-Pull Connector X Series...

// Product 3D CAD Model Links

PPCEGG2B03CLL3D CAD Model