PPCEGG2B04CLL Datasheet




Product Name // 4 Contacts Fixed Socket 2X Series Push **Pull Connector**

View Product Page

* Representative product image only



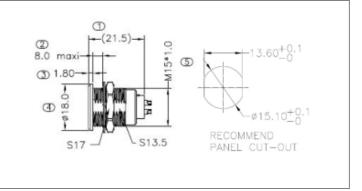

// Product Description:

- 0 4 Contacts Fixed Socket 2X Series Push Pull Connector
- 0 M15x1.0mm Thread
- 0 Nut installation 6Nm
- 0 Available in Straight Plug version
- 0 ROHS compliance
- 0 IP50 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family: Circular Automation Connectors Push Pull Connectors X Series **Product Series:**

Contact Pin Material:

Coupling Nut Retention Force: Current Max:

Diameter Over Coupling Ring Mm: **Durability:**

Fixing Nut Material:

Function: Insulator: Ip Rating:

Panel Cut Out:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: **Number Of Contacts:** Operating Humidity:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage:

Push Pull Connector Series: Rohs Compliant: Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance:**

Thread Size: Vibration Resistance Min: Vibration Resistance Max:

Terminal Diameter:

2X Series Fixed Socket Push Pull Connector

Phosphor bronze gold plated 3u"

6Nm 15A 18mm >4500 cycles Nickel Plated brass

Fixed Socket Push Pull Connector **PPS**

IP50 20AWG 0.50mm2 +200°C -50°C 8.0mm 4 Contacts 0.95

15.10mmx13.60mm

1850V 1850V 2X Series Yes 48h 75dB 40dB 100g 1.3mm M15x1.0mm

10Hz

2000Hz

// Product PDF Links



// Product 3D CAD Model Links

