# PPCEGG2B08CLL Datasheet




# Product Name // 8 Contacts Fixed Socket 2X Series Push **Pull Connector**

View Product Page

## \* Representative product image only



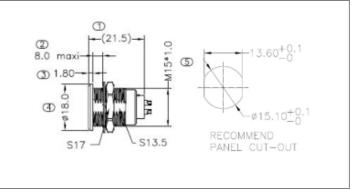

#### // Product Description:

- 0 8 Contacts Fixed Socket 2X Series Push Pull Connector
- 0 M15x1.0mm Thread
- 0 Nut installation 6Nm
- 0 Available in Straight Plug version
- 0 ROHS compliance
- 0 IP50 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

### // General Information:

**Product Display Title:** 

**Product Family: Product Series:** 

Contact Pin Material:

**Coupling Nut Retention Force:** 

**Current Max:** 

Diameter Over Coupling Ring Mm:

**Durability:** 

Fixing Nut Material:

Function: Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature:

Max Panel Thickness: **Number Of Contacts:** Operating Humidity:

Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:** 

**Rohs Compliant:** Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance: Terminal Diameter:** Thread Size:

Vibration Resistance Min:

Vibration Resistance Max:

2X Series Fixed Socket Push Pull Connector Circular Automation Connectors

Push Pull Connectors X Series Phosphor bronze gold plated 3u"

6Nm 10A 18mm >4500 cycles

Nickel Plated brass

Fixed Socket Push Pull Connector **PPS** 

IP50 22AWG 0.34mm2 +200°C -50°C 8.0mm 8 Contacts 0.95

15.10mmx13.60mm

1500V 1250V 2X Series Yes 48h 75dB 40dB 100g 0.9mm M15x1.0mm 10Hz 2000Hz

// Product PDF Links

Push-Pull Connector X Series..

// Product 3D CAD Model Links

PPCEGG2B08CLL3D CAD Model