# PPCEGG2B18CLL Datasheet




## Product Name // 18 Contacts Fixed Socket 2X Series Push **Pull Connector**

View Product Page

#### \* Representative product image only



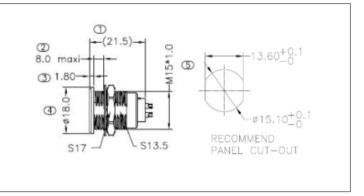

### // Product Description:

- 0 18 Contacts Fixed Socket 2X Series Push Pull Connector
- 0 M15x1.0mm Thread
- 0 Nut installation 6Nm
- 0 Available in Straight Plug version
- 0 ROHS compliance
- 0 IP50 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

#### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

Is Vitalis:

Contact Pin Material:

**Coupling Nut Retention Force: Current Max:** 

Diameter Over Coupling Ring Mm: **Durability:** 

Fixing Nut Material: Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: **Number Of Contacts:** 

Operating Humidity: Panel Cut Out: Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage: **Push Pull Connector Series:** 

**Rohs Compliant:** Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: **Terminal Diameter:** Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 2X Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors X Series

Phosphor bronze gold plated 3u"

6Nm 5.5A 18mm >4500 cycles

Nickel Plated brass Fixed Socket Push Pull Connector

**PPS** IP50 22AWG 0.34mm2 +200°C -50°C 8.0mm 18 Contacts 0.95

15.10mmx13.60mm

850V 1200V 2X Series Yes 48h 75dB 40dB 100g 0.7mm

M15x1.0mm 10Hz 2000Hz

// Product PDF Links



// Product 3D CAD Model Links

PPCEGG2B18CLL3D CAD Model