
PPCEGG2B19CLL Datasheet



🚯 View Product Page

bulain

Pull Connector

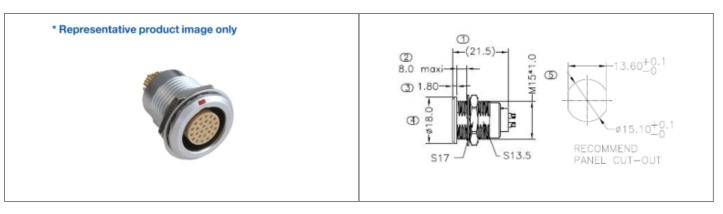

// Product Description:

- O 19 Contacts Fixed Socket 2X Series Push Pull Connector
- O M15x1.0mm Thread
- O Nut installation 6Nm
- O Available in Straight Plug version
- O ROHS compliance
- O IP50 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- O Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:


Product Display Title:
Product Family:
Product Series:
Contact Pin Material:
Coupling Nut Retention Force:
Current Max:
Diameter Over Coupling Ring Mm:
Durability:
Fixing Nut Material:
Function:
Insulator:
Ip Rating:
Max Contact Accomodation Awg:
Max Contact Accomodation Mm2:
Max Operating Temperature:
Min Operating Temperature:
Max Panel Thickness:
Number Of Contacts:
Operating Humidity:
Panel Cut Out:
Pin Pin Terminal Voltage:
Pin Shell Terminal Voltage:
Push Pull Connector Series:
Rohs Compliant:
Salt Spray Corrosion Test:
Shielding Efficiency Min:
Shielding Efficiency Max:
Shock Resistance:
Terminal Diameter:
Thread Size:
Vibration Resistance Min:
Vibration Resistance Max:

2X Series Fixed Socket Push Pull Connector **Circular Automation Connectors** Push Pull Connectors X Series Phosphor bronze gold plated 3u" 6Nm 5A 18mm >4500 cycles Nickel Plated brass Fixed Socket Push Pull Connector PPS IP50 22AWG 0.34mm2 +200°C -50°C 8.0mm 19 Contacts 0.95 15.10mmx13.60mm 950V 4250V 2X Series Yes 48h 75dB 40dB 100g 0.7mm M15x1.0mm 10Hz 2000Hz



// Product 3D CAD Model Links

PPCEGG2B19CLL3D CAD Model



Click Here To Contact Us

Bulgin Datasheets 1