
PPCEGG2K02CLL Datasheet



View Product Page

bulgin

Pull Connector

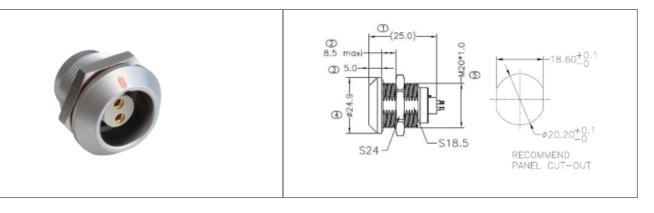

// Product Description:

- 0 2 Contacts Fixed Socket 2Y Series Push Pull Connector
- 0 M20x1.0mm Thread
- 0 Nut Installation torque 9.0Nm
- 0 Available in Straight Plug version
- 0 **ROHS** compliance
- 0 IP66 rated

- 0 Temp:-50 C to +200 C
- 0 Solder Terminals
- Ô Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:


Product Display Title: Product Family: Product Series: Contact Pin Material: **Coupling Nut Retention Force:** Current Max: Diameter Over Coupling Ring Mm: Durability: Fixing Nut Material: Function: Insulator: Ip Rating: Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: Number Of Contacts: **Operating Humidity:** Panel Cut Out: Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series: Rohs Compliant:** Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: **Terminal Diameter:** Thread Size: Vibration Resistance Min: Vibration Resistance Max:

2Y Series Fixed Socket Push Pull Connector **Circular Automation Connectors** Push Pull Connectors Y Series Phosphor bronze gold plated 3u" 9Nm 30A 24.9mm >4500 cycles Nickel Plated brass Fixed Socket Push Pull Connector PPS IP66 16AWG 1.5mm2 +200°C -50°C 8.5mm 2 Contacts 0.95 20.20mmx18.60mm 2100V 1750V 2Y Series Yes 48h 95dB 80dB 100g 2mm M20x1.0mm 10Hz 2000Hz



// Product 3D CAD Model Links

PPCEGG2K02CLL3D CAD Model





Bulgin Datasheets 1