PPCEGG2K04CLL Datasheet




Product Name // 4 Contacts Fixed Socket 2Y Series Push **Pull Connector**

View Product Page

* Representative product image only



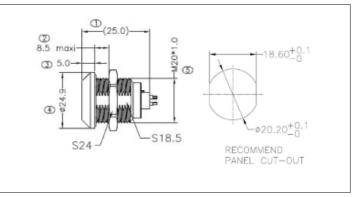

// Product Description:

- 0 4 Contacts Fixed Socket 2Y Series Push Pull Connector
- 0 M20x1.0mm Thread
- 0 Nut Installation torque 9.0Nm
- 0 Available in Straight Plug version
- 0 ROHS compliance
- 0 IP66 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material: Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: **Number Of Contacts:**

Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage:

Push Pull Connector Series: Rohs Compliant: Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance: Terminal Diameter:** Thread Size:

Vibration Resistance Min:

Vibration Resistance Max:

2Y Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series Phosphor bronze gold plated 3u"

9Nm 15A 24.9mm

>4500 cycles Nickel Plated brass

Fixed Socket Push Pull Connector **PPS**

IP66 20AWG 0.50mm2 +200°C -50°C 8.5mm 4 Contacts 0.95

20.20mmx18.60mm

1850V 1850V 2Y Series Yes 48h 95dB 80dB 100g 1.3mm M20x1.0mm 10Hz 2000Hz

// Product PDF Links

Push-Pull Connector Y Series..

// Product 3D CAD Model Links

PPCEGG2K04CLL3D CAD Model