
PPCEGG2K06CLL Datasheet



View Product Page

bulgin

Pull Connector

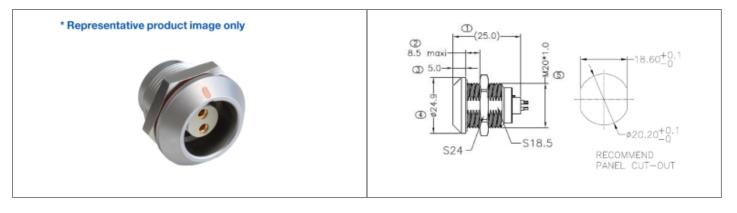

// Product Description:

- O 6 Contacts Fixed Socket 2Y Series Push Pull Connector
- O M20x1.0mm Thread
- O Nut Installation torque 9.0Nm
- O Available in Straight Plug version
- O ROHS compliance
- O IP66 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- O Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:


Product Display Title: Product Family: Product Series: Contact Pin Material: Coupling Nut Retention Force: Current Max: Diameter Over Coupling Ring Mm: Durability: Fixing Nut Material: Function: Insulator: Ip Rating: Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: Number Of Contacts: **Operating Humidity:** Panel Cut Out: Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series: Rohs Compliant:** Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: Terminal Diameter: Thread Size: Vibration Resistance Min: Vibration Resistance Max:


2Y Series Fixed Socket Push Pull Connector **Circular Automation Connectors** Push Pull Connectors Y Series Phosphor bronze gold plated 3u" 9Nm 12A 24.9mm >4500 cycles Nickel Plated brass Fixed Socket Push Pull Connector PPS IP66 20AWG 0.50mm2 +200°C -50°C 8.5mm 6 Contacts 0.95 20.20mmx18.60mm 1350V 1450V 2Y Series Yes 48h 95dB 80dB 100g 1.3mm M20x1.0mm 10Hz 2000Hz



// Product 3D CAD Model Links

PPCEGG2K06CLL3D CAD Model





Bulgin Datasheets 1