PPCEGG2K12CLL Datasheet




Product Name // 12 Contacts Fixed Socket 2Y Series Push **Pull Connector**

View Product Page

* Representative product image only



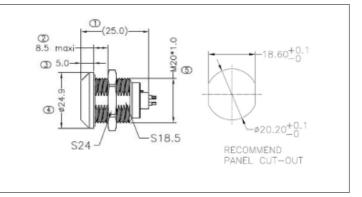

// Product Description:

- 0 12 Contacts Fixed Socket 2Y Series Push Pull Connector
- 0 M20x1.0mm Thread
- 0 Nut Installation torque 9.0Nm
- 0 Available in Straight Plug version
- 0 ROHS compliance
- 0 IP66 rated

- 0 Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature:

Number Of Contacts: Operating Humidity:

Max Panel Thickness:

Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:**

Rohs Compliant: Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance: Terminal Diameter:** Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 2Y Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series Phosphor bronze gold plated 3u"

9Nm 7A

24.9mm >4500 cycles Nickel Plated brass

Fixed Socket Push Pull Connector

PPS IP66 22AWG 0.34mm2 +200°C -50°C 8.5mm 12 Contacts

0.95 20.20mmx18.60mm

1250V 1350V 2Y Series Yes 48h 95dB 80dB 100g 0.7mm

10Hz 2000Hz

M20x1.0mm

// Product PDF Links

Push-Pull Connector Y Series..

// Product 3D CAD Model Links

PPCEGG2K12CLL3D CAD Model