PPCEGG2K18CLL Datasheet




Product Name // 18 Contacts Fixed Socket 2Y Series Push Pull Connector

View Product Page

* Representative product image only



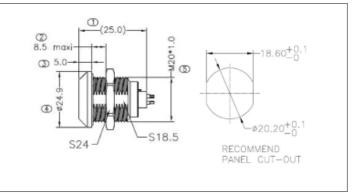

// Product Description:

- 18 Contacts Fixed Socket 2Y Series Push Pull Connector
- O M20x1.0mm Thread
- O Nut Installation torque 9.0Nm
- O Available in Straight Plug version
- O ROHS compliance
- O IP66 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function: Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature:

Max Panel Thickness: Number Of Contacts: Operating Humidity:

Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: Push Pull Connector Series:

Rohs Compliant:
Salt Spray Corrosion Test:
Shielding Efficiency Min:
Shielding Efficiency Max:
Shock Resistance:
Terminal Diameter:
Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 2Y Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series Phosphor bronze gold plated 3u"

9Nm 5.5A 24.9mm >4500 cycles

Nickel Plated brass Fixed Socket Push Pull Connector

PPS IP66 22AWG 0.34mm2 +200°C -50°C 8.5mm 18 Contacts 0.95

20.20mmx18.60mm

850V 1200V 2Y Series Yes 48h 95dB 80dB 100g 0.7mm M20x1.0mm 10Hz

2000Hz

// Product PDF Links



// Product 3D CAD Model Links

