# PPCEGG3B20CLL Datasheet




# Product Name // 20 Contacts Fixed Socket 3X Series Push **Pull Connector**

View Product Page

#### \* Representative product image only



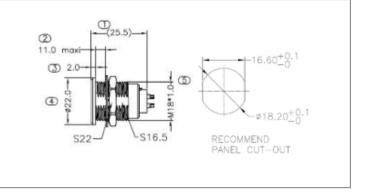

### // Product Description:

- 0 20 Contacts Fixed Socket 3X Series Push Pull Connector
- 0 M18x1.0mm Thread
- 0 Nut installation 9Nm
- 0 Available in Fixed Socket version
- 0 **ROHS** compliance
- 0 IP50 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- High packing density for space savings on panel mounts

#### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

Is Vitalis:

Contact Pin Material:

**Coupling Nut Retention Force:** 

**Current Max:** 

Diameter Over Coupling Ring Mm: **Durability:** 

Fixing Nut Material:

Function: Insulator: Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness:

**Number Of Contacts:** Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:** 

**Rohs Compliant:** 

Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: Terminal Diameter: Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 3X Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors X Series

Phosphor bronze gold plated 3u"

11Nm 6A

22mm >4500 cycles Nickel Plated brass

Fixed Socket Push Pull Connector

**PPS** IP50 22AWG 0.34mm2 +200°C -50°C 11.0mm 20 Contacts 0.95

18.20mmx16.60mm

1000V 900V 3X Series Yes 48h 75dB 40dB 100g

0.7mm M18x1.0mm 10Hz

2000Hz

## // Product PDF Links



## // Product 3D CAD Model Links

Click Here To Contact Us

