PPCEGG3B22CLL Datasheet




Product Name // 22 Contacts Fixed Socket 3X Series Push **Pull Connector**



* Representative product image only



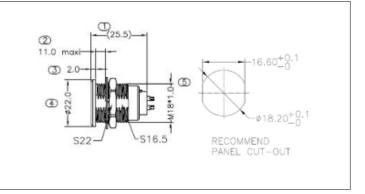

// Product Description:

- 0 22 Contacts Fixed Socket 3X Series Push Pull Connector
- 0 M18x1.0mm Thread
- 0 Nut installation 9Nm
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP50 rated

- Temp:-50 C to +200 C
- 0 Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%

// General Information:

Product Display Title:

Product Family:

Product Series:

Contact Pin Material: **Coupling Nut Retention Force:**

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: **Number Of Contacts:**

Panel Cut Out:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:**

Rohs Compliant: Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance: Terminal Diameter:** Thread Size:

Vibration Resistance Min:

Vibration Resistance Max:

Operating Humidity:

0 Salt Spray Corrosion Test >144h

0 High packing density for space savings on panel mounts

3X Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors X Series Phosphor bronze gold plated 3u"

11Nm 5.5A 22mm >4500 cycles

Nickel Plated brass

Fixed Socket Push Pull Connector **PPS**

IP50 22AWG 0.34mm2 +200°C -50°C 11.0mm 22 Contacts 0.95

18.20mmx16.60mm 1000V

900V 3X Series Yes 48h 75dB 40dB 100g 0.7mm M18x1.0mm 10Hz 2000Hz

// Product PDF Links

Push-Pull Connector X Series..

// Product 3D CAD Model Links

PPCEGG3B22CLL3D CAD Model