
PPCEGG3B30CLL Datasheet



Product Name // 30 Contacts Fixed Socket 3X Series Push Pull Connector

View Product Page



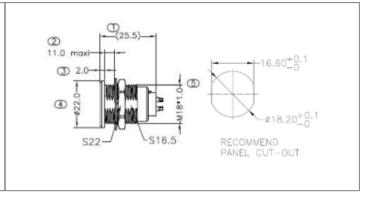

// Product Description:

- O 30 Contacts Fixed Socket 3X Series Push Pull Connector
- M18x1.0mm Thread
- O Nut installation 9Nm
- O Available in Fixed Socket version
- O ROHS compliance
- O IP50 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- O Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series:

Is Vitalis:

Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm: Durability:

Max Contact Accomodation Awg:

Durability

Fixing Nut Material:

Function: Insulator: Ip Rating:

Max Contact Accomodation Mm2:
Max Operating Temperature:
Min Operating Temperature:
Max Operating Temperature:

Max Panel Thickness: Number Of Contacts: Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage: Push Pull Connector Series: Rohs Compliant:

Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: Terminal Diameter:

Thread Size:

Vibration Resistance Min: Vibration Resistance Max:

3X Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors X Series

No

Phosphor bronze gold plated 3u"

11Nm 3.5A 22mm

>4500 cycles Nickel Plated brass

Fixed Socket Push Pull Connector

PPS IP50 22AWG 0.34mm2 +200°C -50°C 11.0mm 30 Contacts 0.95

18.20mmx16.60mm

800V 700V 3X Series Yes 48h 75dB 40dB 100g

0.7mm M18x1.0mm 10Hz

2000Hz

// Product PDF Links



// Product 3D CAD Model Links



Click Here To Contact Us