
PPCEGG3K10CLL Datasheet



Product Name // 10 Contacts Fixed Socket 3Y Series Push Pull Connector

View Product Page



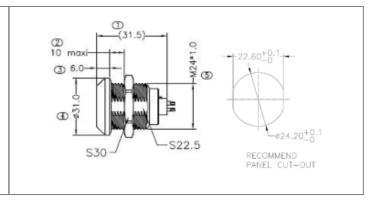

// Product Description:

- O 10 Contacts Fixed Socket 3Y Series Push Pull Connector
- O M24x1.0mm Thread
- O Nut Installation torque 12Nm
- O Available in Straight Plug version
- ROHS compliance
- O IP66 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function: Insulator:

Ip Rating:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness:

Number Of Contacts: Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage:
Pin Shell Terminal Voltage:

Pin Shell Terminal Voltage: Push Pull Connector Series: Rohs Compliant:

Rohs Compliant:
Salt Spray Corrosion Test:
Shielding Efficiency Min:
Shielding Efficiency Max:
Shock Resistance:
Terminal Diameter:
Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 3Y Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series Phosphor bronze gold plated 3u"

12Nm 12A 31mm

>4500 cycles Nickel Plated brass

Fixed Socket Push Pull Connector PPS

IP66 20AWG 0.50mm2 +200°C -50°C 10mm 10 Contacts 0.95

24.20mmx22.60mm

1250V 900V 3Y Series Yes 48h 95dB 80dB 100g 1.3mm M24x1.0mm

10Hz

2000Hz

// Product PDF Links

Push-Pull Connector Y Series...

// Product 3D CAD Model Links

PPCEGG3K10CLL3D CAD Model

