
## PPCEGG3K16CLL Datasheet



View Product Page

bulgin

## **Pull Connector**

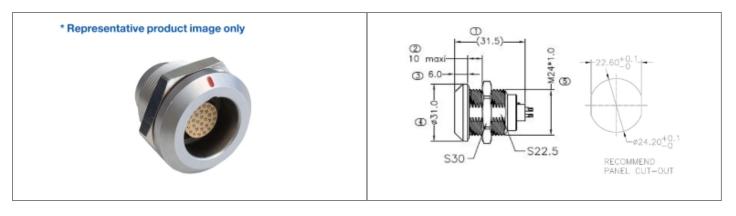

## // Product Description:

- O 16 Contacts Fixed Socket 3Y Series Push Pull Connector
- O M24x1.0mm Thread
- O Nut Installation torque 12Nm
- O Available in Straight Plug version
- O ROHS compliance
- O IP66 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- O Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

## // General Information:


**Product Display Title: Product Family: Product Series: Contact Pin Material: Coupling Nut Retention Force:** Current Max: Diameter Over Coupling Ring Mm: Durability: Fixing Nut Material: Function: Insulator: Ip Rating: Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: Number Of Contacts: **Operating Humidity:** Panel Cut Out: Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series: Rohs Compliant:** Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: Terminal Diameter: Thread Size: Vibration Resistance Min: Vibration Resistance Max:

3Y Series Fixed Socket Push Pull Connector **Circular Automation Connectors** Push Pull Connectors Y Series Phosphor bronze gold plated 3u" 12Nm 8A 31mm >4500 cycles Nickel Plated brass Fixed Socket Push Pull Connector PPS IP66 22AWG 0.34mm2 +200°C -50°C 10mm 16 Contacts 0.95 24.20mmx22.60mm 1200V 850V **3Y Series** Yes 48h 95dB 80dB 100g 0.9mm M24x1.0mm 10Hz 2000Hz



// Product 3D CAD Model Links

PPCEGG3K16CLL3D CAD Model



Click Here To Contact Us

Bulgin Datasheets 1