PPCEGG3K24CLL Datasheet




Product Name // 24 Contacts Fixed Socket 3Y Series Push Pull Connector

View Product Page

* Representative product image only



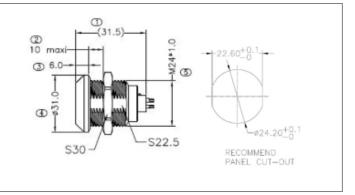

// Product Description:

- 24 Contacts Fixed Socket 3Y Series Push Pull Connector
- O M24x1.0mm Thread
- O Nut Installation torque 12Nm
- O Available in Straight Plug version
- O ROHS compliance
- O IP66 rated

- O Temp:-50 C to +200 C
- O Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Coupling Nut Retention Force:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Fixing Nut Material:

Function:

Insulator:

Ip Rating:

Max Contact Accomodation Awg:
Max Contact Accomodation Mm2:
Max Operating Temperature:
Min Operating Temperature:
Max Panel Thickness:
Number Of Contacts:

Operating Humidity: Panel Cut Out:

Pin Pin Terminal Voltage:
Pin Shell Terminal Voltage

Pin Shell Terminal Voltage: Push Pull Connector Series: Rohs Compliant: Salt Spray Corrosion Test:

Salt Spray Corrosion Test Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: Terminal Diameter: Thread Size:

Vibration Resistance Min: Vibration Resistance Max: 3Y Series Fixed Socket Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series Phosphor bronze gold plated 3u"

12Nm 4A 31mm

>4500 cycles Nickel Plated brass

Fixed Socket Push Pull Connector

PPS IP66 22AWG 0.34mm2 +200°C -50°C 10mm 24 Contacts 0.95

24.20mmx22.60mm

950V 800V 3Y Series Yes 48h 95dB 80dB 100g 0.7mm M24x1.0mm 10Hz 2000Hz

// Product PDF Links



// Product 3D CAD Model Links

