# PPCFGG0B03CLAD Datasheet




## Product Name // 3 Contacts Straight Plug 0X Series Push **Pull Connector**

View Product Page

### \* Representative product image only



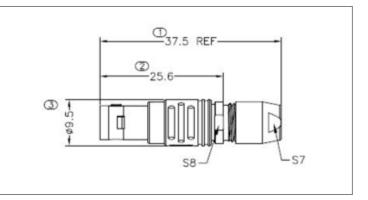

#### // Product Description:

- 0 3 Contacts Straight Plug 0X Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP50 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** Contact Pin Material:

**Current Max:** 

Diameter Over Coupling Ring Mm:

**Durability:** 

Function:

Insulator: Ip Rating:

Locking Sleeve Material:

Max Cable Entry Size:

Min Cable Entry Size: Max Contact Accomodation Awg:

Max Contact Accomodation Mm2:

Max Operating Temperature:

Min Operating Temperature: **Number Of Contacts:** 

Operating Humidity:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage:

**Push Pull Connector Series:** 

**Rohs Compliant:** 

Salt Spray Corrosion Test:

Shielding Efficiency Min: Shielding Efficiency Max:

Shock Resistance:

**Terminal Diameter:** 

Vibration Resistance Min: Vibration Resistance Max:

0X Series Straight Plug Push Pull Connector

Circular Automation Connectors

Push Pull Connectors X Series

Brass gold plated 3u"

9.5mm

>4500 cycles

Straight Plug Push Pull Connector **PPS** 

IP50

Brass plated

5.0mm

4.3mm

22AWG

0.34mm2 +200°C

-50°C

3 Contacts

0.95 1200V

900V

0X Series

Yes

48h

75dB

40dB 100g

0.9mm

10Hz 2000Hz

// Product PDF Links

Push-Pull Connector X Series...

// Product 3D CAD Model Links

PPCFGG0B03CLAD3D CAD Model