PPCFGG0B07CLAD Datasheet




Product Name // 7 Contacts Straight Plug 0X Series Push **Pull Connector**

View Product Page

* Representative product image only



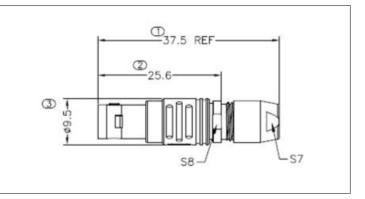

// Product Description:

- 0 7 Contacts Straight Plug 0X Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP50 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Function:

Insulator: Ip Rating:

Locking Sleeve Material:

Max Cable Entry Size:

Min Cable Entry Size: Max Contact Accomodation Awg:

Max Contact Accomodation Mm2:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts:

Operating Humidity:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage:

Push Pull Connector Series:

Rohs Compliant:

Salt Spray Corrosion Test:

Shielding Efficiency Min: Shielding Efficiency Max:

Shock Resistance:

Terminal Diameter: Vibration Resistance Min:

Vibration Resistance Max:

0X Series Straight Plug Push Pull Connector

Circular Automation Connectors

Push Pull Connectors X Series

Brass gold plated 3u"

2.5A 9.5mm

>4500 cycles

Straight Plug Push Pull Connector **PPS**

IP50

Brass plated

5.0mm

4.3mm

28AWG

0.08mm2 +200°C

-50°C

7 Contacts

0.95 800V

700V

0X Series

Yes 48h

75dB

40dB 100g

0.5mm 10Hz

2000Hz

// Product PDF Links

Push-Pull Connector X Series...

// Product 3D CAD Model Links

PPCFGG0B07CLAD3D CAD Model